

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-095-21058-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 33 Twp. 27S Rge. 7W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
1485' FEL, 2130' FNL

Lease Owner KAN-EX, Inc.
Lease Name GRABER Well No. 1

Office Address 800 Bitting Bldg., Wichita, Kansas 67202

Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed 3/21 19 81
Application for plugging filed (Verbally) 3/21 19 81
Application for plugging approved (Verbally) 3/21 19 81
Plugging commenced 3/21 19 81
Plugging completed 3/21 19 81

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered


If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin

Producing formation Depth to top Bottom Total Depth of Well

Show depth and thickness of all water, oil and gas formations.

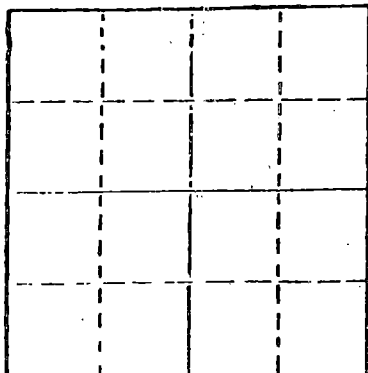

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

T.D. 4243',
Set 1st plug @ 270' with 50 sx.,
2nd plug @ 40' with 10 sx.,
3 sx. in rathole. Cemented with
50/50 posmix, 3% Ca.Cl. Job completed
@ 12:15 p.m. 3/21/81. State Pluggger -
Duane Rankin.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KAW Drilling Co., Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
K.S. Martin (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) K.S. Martin
K.S. Martin, 1010 Union Center, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of March, 1981

My commission expires



Kathy S. Goertz
Kathy S. Goertz Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

MAR 26 1981

CONSERVATION DIVISION
Wichita, Kansas

OPERATOR: KAN-EX, INC.
 CONTRACTOR: KAW Drilling Co., Inc.
 WELL NAME: GRABER #1
 LOCATION: 1485' FEL, 2130' FNL
 Section 33-27S-7W
 Kingman County, Kansas
 SPUD DATE: March 10, 1981
 COMPLETION DATE: March 21, 1981


0	85	Rock & sand
85	253	Shale
253	290	Plug, shale, sand & shells
290	1149	Red bed & soft shale
1149	1523	Shale & shell
1523	3295	Shale
3295	3935	Shale & Lime
3935	4243	Lime
	4243	R.T.D.

Spud hole @ 1:00 p.m. 3/10/81. Drilled 250' of 12 1/4" hole. Ran 6 jts. of used 8 5/8" - 24# surface casing. (Tallied 235') Set @ 238' with 175 sx. of common cement, 2% gel, 3% Ca.Cl. Cement did circulate. Plug was down @ 6:30 p.m. 3/10/81.


T.D. 4243', Set 1st plug @ 270' with 50 sx., 2nd plug @ 40' with 10 sx., 3 sx. in rathole. Cemented with 50/50 posmix, 3% Ca.Cl. Job completed @12:15 p.m. 3/21/81. State Plugger - Duane Rankin.


STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, K.S. Martin, President of KAW Drilling Co., Inc., being first duly sworn on oath, state that: I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.


 K.S. Martin, President

SUBSCRIBED AND SWORN TO before me on this 24th day of March, 1981.




 Kathy S. Goertz, Notary Public

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 26 1981
 CONSERVATION DIVISION
 Wichita, Kansas