


15-095-20191-0000 09

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

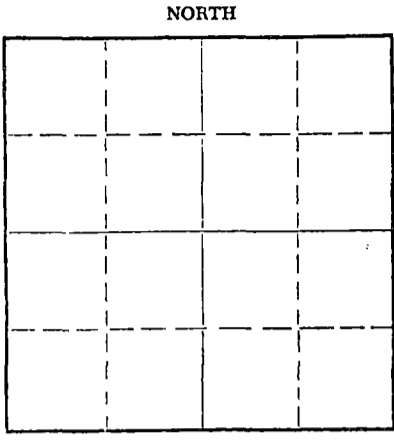

Kingman County. Sec. 20 Twp 27S Rge. (E) 6 (W)
Location as "NE/CNW&SWK" or footage from lines 825' FWL & 495' FSL of SE/4
Lease Owner Et., Al., Inc.
Lease Name Freemyer Well No. 2
Office Address 119 Cameron Bldg., Okla. City, Okla. 73106
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Dec. 20, 19 69
Application for plugging filed Dec. 20, 19 69
Application for plugging approved Dec. 20, 19 69
Plugging commenced Dec. 20, 19 69
Plugging completed Dec. 20, 19 69
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Herman Justus
Producing formation Depth to top Bottom Total Depth of Well 3121 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	251	8-5/8	251	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 240 feet. Set first plug @ 240 ft. w/1/2 sack hulls and 25 sacks cement. Filled hole with heavy mud to 40 feet. Set second plug @ 40 ft. w/1/2 sack hulls and 10 sacks cement. Bridged rat hole with 2 sacks cement. Job complete @ 12:00 Midnight, 12/20/69.

RECEIVED
STATE CORPORATION COMMISSION
DEC 24 1969
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. E. Hall

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Hall

830 Sutton Place, Wichita, Kansas 67202
(Address)



Subscribed and Sworn to before me this 22 day of December, 19 69
Barbara J. Layton
Notary Public.

15095-20191-0000
OP

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

RECEIVED
STATE CORPORATION COMMISSION
DEC 24 1969
CONSERVATION DIVISION
Wichita, Kansas

FREEMYER #2
825' E of WL & 495' N of SL
of SE/4 Section 20-27S-6W
Kingman County, Kansas

Commenced: December 13, 1969
Completed: December 20, 1969

OPERATOR - Et., Al., Inc.

DEPTH		FORMATION	REMARKS
From	To		
0	235	Sand, shale and shells	
235	251	Shale and shells	Ran 7 joints 8-5/8" casing, set @ 251' w/225 sacks cement.
251	1043	Shale and shells	
1043	1545	Lime and shale	
1545	1755	Lime	
1755	3121	Lime and shale	
3121	TD		Dry and abandoned.

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled 825' E of WL and 495' N of SL of SE/4 Section 20-27S-6W, Kingman County, Kansas, to the best of my knowledge and belief.

E. E. Hall
E. E. HALL

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 23 day of December, 1969, personally appeared E. E. Hall to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972.

Barbara J. Layton
Barbara J. Layton, Notary Public

