

15-095-20236-000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kingman County, Sec. 31 Twp. 27S Rge. 6W ~~K6X~~ ~~XW~~
Location as "NE/CNW/SW" or footage from lines SW/4 SW/4
Lease Owner Donald T. Ingling, et al
Lease Name Young Well No. "F" # 1
Office Address 615 First National Bank Bldg. - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 31, 19 70
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced January 13, 19 71
Plugging completed January 13, 19 71
Reason for abandonment of well or producing formation _____

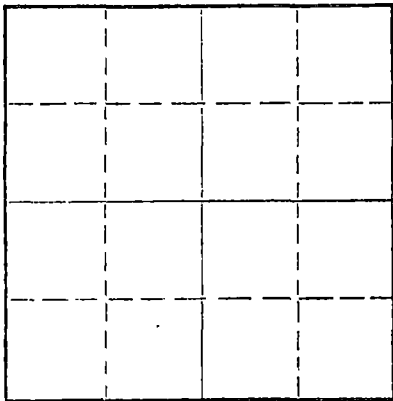

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,310 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	249'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4,310 feet (rotary total depth) to 235 feet. Set plug at 235 feet and cemented with 35 sacks of cement. Filled hole with heavy rotary mud from 235 feet to 40 feet. Set solid plug at 40 feet and cemented with 10 sacks of cement, 2 sacks of cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION
JAN 23 1971
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.
Address 200 North Main - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dean Britting, Agent (employee of owner) ~~not owner or operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 14th day of January, 19 71



Elsie Willison
Notary Public.

June 30, 1974

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

15-095-20236-0000

COMPANY Donald T. Ingling, et al

SEC. 31 T. 27S R. 6W

FARM Young

NO. "F" # 1

LOG. SW/4 SW/4

TOTAL DEPTH 4,310'

COUNTY Kingman


COMM. Dec. 18, 1970

COMP. Dec. 31, 1970

SHOT OR TREATED

CONTRACTOR H-30, Inc.

ISSUED



CASING

20	10		
15		8-5/8" 249' cemented w/185 sxs cement	ELEVATION 1518 KB
12		6	
13		5	

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Top Soil	20'
Shale	985'
Shale and Lime	1680'
Shale and Lime Streaks	2000'
Shale and Lime	2675'
Lime	2810'
Lime and Shale	3090'
Shale and Lime	3127'
Lime	3745'
Shale	3768'
Lime	3883'
Chert	3948'
Cherty Lime	3967'
Lime	4056'
Lime and Shale	4095'
Lime and Chert	4127'
Lime	4255'
Sand	4310'

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 22 1971
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the above and foregoing to be true and correct depths of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting

State of Kansas }
 County of Sedgwick } SS:

Subscribed and Sworn to before me a Notary Public
 on and for said county and state this 31st. day
 of December, 1970.

Elsie Willison
 Elsie Willison - Notary Public

My Commission Expires:
 June 30, 1974.

