

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Stafford County, Sec. 11 Twp. 24 Rge. (E)15 (W)

Location as "NE/CNWSW" or footage from lines W/2 W/2 NE 1/4

Lease Owner Hellar Drlg. Co.

Lease Name Nagel Well No. 1

Office Address 710 Petroleum Bldg. Wichita

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed _____ 19 72

Application for plugging filed Aug. 30 19 74

Application for plugging approved Aug. 31 19 74


Plugging commenced Oct. 22 19 74

Plugging completed Nov. 7 19 74

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19 73

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

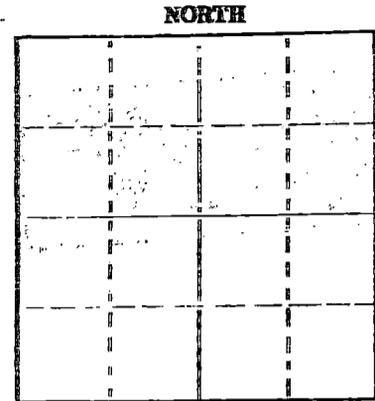

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation K. C. Depth to top 3914 Bottom 4060 Total Depth of Well 4060

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	FOOT IN	PULLED OUT
	Surface	0	265	8 5/8		
		0	4056	4 1/2		3130.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand to 3500 dumped 5 sx. cement

Plug at 200 ft. Filled to bottom of surface with 4 yards of ready mix cement

RECEIVED
 STATE CORPORATION COMMISSION

NOV 11 1974

11-11-74
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Nicholas Casing Pulling
 Address Box 373 Geneseo Kansas 67444

STATE OF Kansas COUNTY OF Rice, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Nicholas

8th day of November 19 74



My commission expires August 27, 1978

(Address) _____
B. J. Farley
 Notary Public.

DRILLER'S LOG

COMPANY: Hellar Drilling Company, Inc.
 CONTRACTOR: Hellar Drilling Company, Inc.
 LEASE: #1 Nagel
 LOCATION: c W/3 W/2 NE/4 Section 11-248-15W
 Stafford County, Kansas
 COMMENCED: September 11, 1963
 COMPLETED: September 20, 1963
 CASING: Set 8 5/8" surface casing @ 235'/190 sacks cement
 Set 4 1/2" casing @ 4056'/175 sacks cement

0-205	Shale-shells
205-939	Sand-Red Beds
939-989	Sand
989-1383	Shale-shells-sand
1383-1765	Shale
1765-2150	Lime & shale
2150-2180	Shale & lime
2180-2415	Lime & shale
2415-2540	Lime
2540-2720	Shale & Lime
2720-3380	Lime & shale
3380-3450	Lime
3450-3585	Lime w/shale stks.
3585-3684	Lime & shale
3684-4060	Lime
4060	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 6 1964
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS.
 COUNTY OF SEDGWICK)

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Nagel, located in c W/2 W/2 NE/4 Section 11-248-15W, Stafford County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

By *D. L. Hellar*
 President - D. L. Hellar

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 8th day of October, 1963.

My Commission Expires:
 March 25, 1964.

Catherine Darcey
 Notary Public - Catherine Darcey