

15-079-00173-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Harvey County, Sec. 10 Twp. 23 Rge. 3 WE (W)

Location as "NE/CNW/SW" or footage from lines NW NW NE
Lease Owner Harold Milburn
Lease Name P. Schrag Well No. I
Office Address 3803 Panorama Dr. Hutchinson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) gas
Date well completed 11-2 1949
Application for plugging filed 7-22 1975
Application for plugging approved 7-23 1975
Plugging commenced 7-24 1975
Plugging completed 7-25 1975
Reason for abandonment of well or producing formation

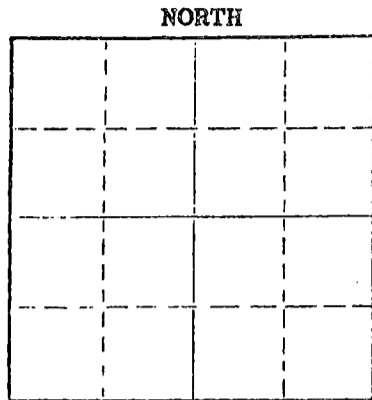

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation Depth to top Bottom Total Depth of Well 3342' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"		2002'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3342' to 3200'. Dumped 4 sx of cement. Mudded hole to 230'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement filling to the bottom of the celler.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Inc.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature] 2809 King St. Hutchinson, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 27th day of July, 1975

My commission expires December 31, 1977 [Signature] Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

JUL 29 1975
7-29-75
CONSERVATION DIVISION
Wichita, Kansas

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


15-079-60173-0000

Company- GEO. SIEGRIST OIL CO.
Firm- P. Schrag No. 1

SEC. 10 T. 23 R. 3W
NW NW NE

Total Depth. 3342
Comm. 9-14-49 Comp. 11-2-49
Shot or Treated.
Contractor.
Issued. 2-9-52

County Harvey
KANSAS



Elevation. 1467

Production. Est. 35 bbls.

CASING:

8 5/8 - 200
4 1/2 - 3280

Figures Indicate Bottom of Formations.

Scout Tops:
Brown lime 2479'
White lime 2502'
Miss. 3260'

LOG NOT AVAILABLE

TD - 3342'

RECEIVED
STATE CORPORATION COMMISSION

JUL 23 1975

CONSERVATION DIVISION
Wichita, Kansas