


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Info. in Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
of formations.



Locate well correctly on above  
Section Plat

Stafford County - Sec. 3 Twp. 24S Rge. 11 (W)  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C-S/2-NE-SW  
Lease Owner Deep Rock Oil Corp.  
Lease Name James S. Henry Well No. 5  
Office Address Box 1051 Tulsa, Okla.  
Character of Well (completed as Oil, Gas or Dry Hole) oil well  
Date well completed 1/10/42 19.  
Application for plugging filed 11/21/47 19.  
Application for plugging approved 11/24/47 19.  
Plugging commenced 3/15/48 19.  
Plugging completed 3/20/48 19.  
Reason for abandonment of well or producing formation well went dry

If a producing well is abandoned, date of last production Dec. 19. 47  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Charlie Stough  
Producing formation viola lime Depth to top 3729' Bottom Total Depth of Well 3768' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	551'	none
				5 1/2"	3729'	2904'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with mud & rock to 3729'. Dumped 5 sks. cement--filled hole with mud to 275'--dumped 15 sks. cement--filled hole with mud to within 15' of top. Dumped 5 sks. cement to top of hole & bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Deep Rock Oil Corp.  
Address Box 429 Hutchinson, Kans.


STATE OF \_\_\_\_\_, COUNTY OF Reno, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack Smith

Box 429 - Hutchinson, Kans.  
(Address)

SUBSCRIBED AND SWORN to before me this 1st day of April

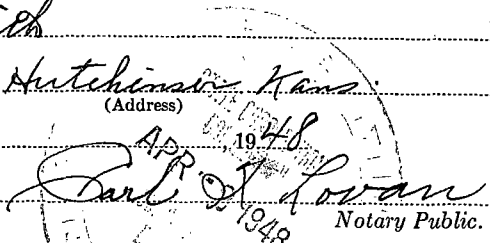

My commission expires 11-26-51

PLUGGING  
FILE SEC 3 T 24 R 11W  
BOOK PAGE 143 LINE 40

4-2-48

## Log on James S. Henry #5

Sec. 3 Twp. 24S Rge. 11W

Stafford County, Kansas

0	41	Sand
41	375	Sand, shells and red rock
375	542	Sand, shale and shells
542	566	Anhydrite
566	870	Shale, shells and sand
870	1470	Shale, sand and shells
1470	1650	Shale and shells
1650	1735	Shale and Lime
1735	1885	Shale and shells
1885	1945	Lime and shale breaks
1945	1960	Lime and shale streaks
1960	1972	Lime
1972	2013	Shale and Lime
2013	2305	Shale and shells
2305	2420	Shale and Lime
2420	2525	Shale
2525	2692	Shale and Lime
2692	2710	Lime
2710	2780	Shale and shells
2780	2920	Lime and shale streaks
2920	2990	Lime and shale breaks
2990	3050	Shale and shells
3050	3130	Lime
3130	3193	Lime and shale breaks
3193	3275	Lime and shale
3275	3350	Shale and lime streaks
3350	3445	Lime broken
3445	3488	Lime (3468 to 3488 cherty lime)
3488	3560	Lime and shale
3560	3610	Shale and shells
3610	3653	Shale and lime shells
3653	3704	Shale and lime
3704	3715	Shale and shells
3715	3729	Cored
3729	3733	Cored - Lime Viola
3733	3768	Viola Lime pay
3768		Total Depth

## Pipe records:

551' of 8 5/8" 28# LW S.H. csg. --cemented w/ 275 sks. cement  
 3729' of 5 1/2" 17# Smls csg.  
 bottom 2142' S.H. 17# 1p thd.  
 top 1587' new 17# 8 rd. thd.  
 --cemented w/ 135 sks. cement

