

15-095-00395-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kingman County. Sec. 15 Twp. 27S Rge. 10W (XX) (W)

NORTH

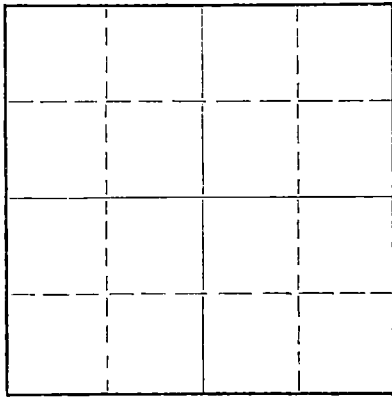

Locate well correctly on above
Section Plat

Location as "NE/CNW4SW4" or footage from lines C-SE/4-SE/4-NE/4

Lease Owner Amerada Petroleum Corporation

Lease Name Helena Stroot Well No. 1

Office Address Box 197 - Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed July 21, 19 54

Application for plugging filed October 20, 19 58

Application for plugging approved October 22, 19 58

Plugging commenced October 24, 19 58

Plugging completed October 26, 19 58

Reason for abandonment of well or producing formation Unprofitable to Operate

If a producing well is abandoned, date of last production September 6, 19 58

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel

Producing formation Viola Depth to top 4274' Bottom _____ Total Depth of Well 4283' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	343'	0
				5-1/2"	4298'	3234'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill 5-1/2" Casing W/Sand 3842' to 3780'. Dump 5 Sax Cement from 3780' to 3740'
Mix & Circ. Mud thru 5-1/2" Casing @ 1400' -
Hole was full of heavy mud to 250' from top, spotted 20 sax cement down 8-5/8" Casing
from 250' to 190'. Filled hole with heavy mud to 35' from top. Mixed & dumped 10 Sax
Cement filling surface casing to top as required by State Pluggger, Fred Hampel.

RECEIVED
OCT 29 1958
CONSERVATION DIVISION
Wichita, Kansas
10-29-58

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.

Address Box 304 - Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Ernest Higgins (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Higgins

Box 197 - Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of October, 19 58

My commission expires July 29, 1961

James Swarney
Notary Public.

PLUGGING
FILE SEC 15 T 27 R 10W
BOOK PAGE 130 LINE 6

