

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-075-20032-00-00
Spot: SENWSENW Sec/Twnshp/Rge: 1-24S-41W
3385 feet from S Section Line, 3361 feet from E Section Line
Lease Name: BOLTZ Well #: 1D
County: HAMILTON Total Vertical Depth: 1180 feet

Operator License No.: 4894
Op Name: HORSESHOE OPERATING, INC.
Address: 110 W LOUISIANA STE 200
MIDLAND, TX 79701

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		1180		
PROD	2.875	1178	0	WITH 150 SX CMT
SURF	0	0		0 SX

Well Type: SWD UIC Docket No: D16385.0 Date/Time to Plug: 03/10/2016 9:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: BRETT COOK Company: HORSESHOE OPERATING Phone: (620) 847-8267

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/17/2016 10:00 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

COULD NOT RELEASE THE PACKER TO PULL THE 1 1/2" TBG. LOWERED PACKER DOWN TO 1018'. CUT TBG AT 880' & TOOH. LEFT 140' OF 1 1/2" TBG AND A PACKER IN THE HOLE. TAKE INJECTION RATE DOWN 2 7/8" CASNG 1 BPM AT 500 PSI. FILL 2 7/8" CASING WITH CMT FROM 1018' TO 0' USING 25# HULLS & 40 SX CMT. HOLDING AT 500#.

Perfs:

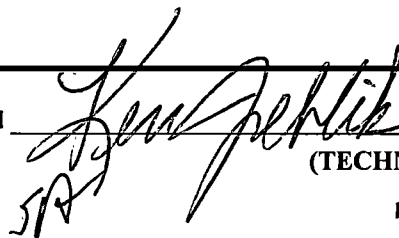
Top	Bot	Thru	Comments
1008	1018		

Remarks: **COMPLIANCE ISSUE:: DENIED TA SI 10 YRS** USED CLASS A COMMON CEMENT BY ALLIED.

Plugged through: TBG

District: 01

Signed


(TECHNICIAN)

RECEIVED
MAR 28 2016
KCC DODGE CITY

Received
KANSAS CORPORATION COMMISSION Form CP-2/3

MAR 31 2016
CONSERVATION DIVISION
WICHITA, KS

no
cc-uc
4-7-16