

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-169-30039-00-00
Spot: SWNENWNW Sec/Twnshp/Rge: 33-15S-1W
330 feet from N Section Line, 990 feet from W Section Line
Lease Name: MILLER B Well #: 4
County: SALINE Total Vertical Depth: 2634 feet

Operator License No.: 30931
Op Name: DAYSTAR PETROLEUM, INC.
Address: 522 N. MAIN ST PO BOX 560
EUREKA, KS 67045

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2631		25 SX
SURF	8.625	139		90 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/23/2015 1:45 PM
Plug Co. License No.: 5920 Plug Co. Name: BANDY, TERRY P. DBA TE-PE OIL & GAS
Proposal Rcvd. from: TERRY BANDY Company: TE PE OIL & GAS Phone: (620) 628-4428

Proposed Plugging Method: SAND 50' ABOVE BOTTOM OF WELL, CAP WITH 3 SX CEMENT. PULL TO 250' AND CIRC TO SURFACE INSIDE 5.5. 1" TUBING DOWN BACK SIDE OF 5.5" AT 250' AND CIRC TO SURFACE.

Plugging Proposal Received By: DAVID BOLLENBACK WitnessType: PARTIAL
Date/Time Plugging Completed: 12/23/2015 1:45 PM KCC Agent: DAVID BOLLENBACK

Actual Plugging Report:

PLACED 75 SX OF SAND TO 2565' AND TOPPED WITH 5 SX OF CEMENT (NOT WITNESSED). CIRC LATE THROUGH TUBING INSIDE OF 5.5" AT 250' TO SURFACE, GOOD CIRC, WITH 35 SX. ATTEMPT 1" BACK-SIDE OF 5.5" AT 250', COULD ONLY GET DOWN TO 190'. CIRC CEMENT FROM 190' TO SURFACE ON BACK SIDE. USED 65 SX TOPPED OFF WITH 15 SX. QUALITY WELL SERVICE PERFORMED CEMENT WORK TICKET #6445.

Perfs:

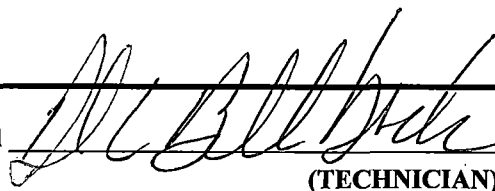
Top	Bot	Thru	Comments
2617	2634		

Remarks: DUE TO HIGH FLUID LEVEL

Plugged through: TBG

District: 02

Signed


(TECHNICIAN)

Received
KANSAS CORPORATION COMMISSION
Form CP-2/3
MAR 24 2016
CONSERVATION DIVISION
WICHITA, KS

no
4-7-16

1/3