

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-21344-00-00
Spot: S2NENESE Sec/Twnshp/Rge: 2-31S-7W
2160 feet from S Section Line, 380 feet from E Section Line
Lease Name: TIDWELL Well #: 1
County: HARPER Total Vertical Depth: 4415 feet

Operator License No.: 9860
Op Name: CASTLE RESOURCES, INC.
Address: BOX 87
SCHOENCHEN, KS 67667

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4415	2610	125 SX
SURF	8.625	254		165 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/25/2016 8:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE Company: MIKE'S TESTING & SALVAGE INC Phone: _____

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/25/2016 5:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

PUMPED 2 SKS OF HULLS AND 30 SKS OF CEMENT TO PLUG OFF PERFS. TAGGED CEMENT AT 3924'. RECOVERED CASING FROM 2610' AND PULLED TO 1270', WHERE 35 SKS OF CEMENT WAS SPOTTED. PULLED CASING TO 801', WHERE 35 SKS OF CEMENT WAS SPOTTED. PULLED CASING TO 300', WHERE CEMENT CIRCUALTED TO SURFACE WITH 125 SKS OF CEMENT.

Perfs:


Top	Bot	Thru	Comments
4328	4334	CSG	

Remarks: GLOBAL CEMENT. COMMON CEMENT.

Plugged through: CSG

District: 02

Signed _____

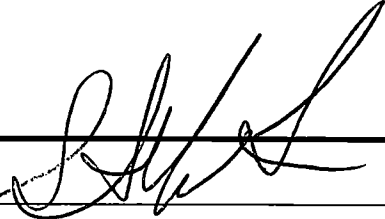

(TECHNICIAN)
KCC WICHITA

APR 05 2016

RECEIVED

Handwritten initials and date
720
4-7-16

Form CP-2/3

Handwritten mark
✓