

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-21394-00-00
Spot: NWSWNE Sec/Twnshp/Rge: 2-31S-7W
1650 feet from N Section Line, 2310 feet from E Section Line
Lease Name: OSCAR SMITH Well #: 3
County: HARPER Total Vertical Depth: 4405 feet

Operator License No.: 9860
Op Name: CASTLE RESOURCES, INC.
Address: BOX 87
SCHOENCHEN, KS 67667

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|----------|
| PROD | 5.5 | 4401 | 2222 | 125 SX |
| SURF | 8.625 | 251 | | 175 SX |

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/22/2016 8:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE Company: MIKE'S TESTING & SALVAGE Phone: _____

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL
Date/Time Plugging Completed: 03/22/2016 5:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 4260' & CAPPED WITH 5 SKS CEMENT. THE CASING WAS RECOVERED FROM 2222' & PULLED TO 1260' WHERE 35 SXS OF CEMENT WAS SPOTTED. TAGGED CEMENT AT 1120'. PULLED CASING TO 821' & SPOTTED 35 SXS CEMENT. PULLED CASING TO 301' & CIRCUALTED CEMENT TO SURFACE.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4331 | 4341 | CSG | |

Remarks: GLOBAL CEMENTING COMMON CEMENT

Plugged through: CSG

District: 02

Signed _____

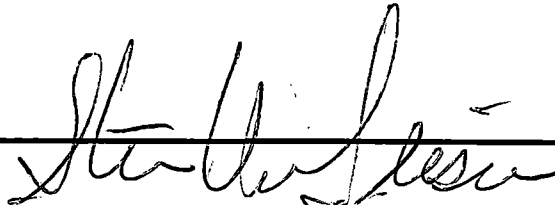

(TECHNICIAN)

KCC WICHITA

MAR 25 2016

RECEIVED

Form CP-2/3

NO
4-7-16

1/3