

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-21453-00-00
Spot: E2E2W2NE Sec/Twnshp/Rge: 20-33S-6W
1320 feet from N Section Line, 1575 feet from E Section Line
Lease Name: TRUBY D Well #: 1
County: HARPER Total Vertical Depth: 4520 feet

Operator License No.: 34192
Op Name: SANDRIDGE EXPLORATION AND PRO
Address: 123 ROBERT S. KERR AVE
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4515	1500	200 SX
SURF	8.625	280		200 SX
T1	2.875	4425		

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 03/17/2016 12:00 AM
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.
Proposal Rcvd. from: RON ORR Company: ORR ENTERPRISES, INC. Phone: (405) 429-6002

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/18/2016 3:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

SET CIBP @ 4385'. RUN TUBING TO 4380' & LOADED HOLE WITH MUD & SPOTTED 10 SXS CEMENT. THE CASING WAS RECOVERED FROM 1500' & PULLED FROM THE WELL BORE. TUBING WAS RUN TO 1200' WHERE 35 SXS OF CEMENT WAS SPOTTED. PULLED TUBING TO 700' WHERE 35 SXS OF CEMENT WAS SPOTTED. PULLED TUBING TO 330' & CIRCUALTED CEMENT TO SURFACE.

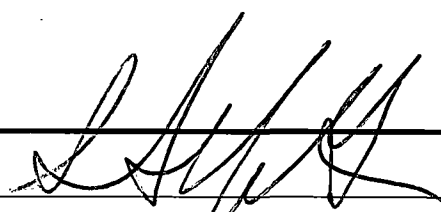
Perfs:

Top	Bot	Thru	Comments
4434	4440	CSG	
4430	4440	CSG	

Remarks: ORR ENTERPRISES. CLASS "C" CEMENT

Plugged through: TBG

District: 02

Signed 

(TECHNICIAN)
KCC WICHITA

MAR 29 2016

RECEIVED

Form CP-2/3

no
4-7-16

JK