


DISTRICT CONSERVATION AGENT'S REPORT

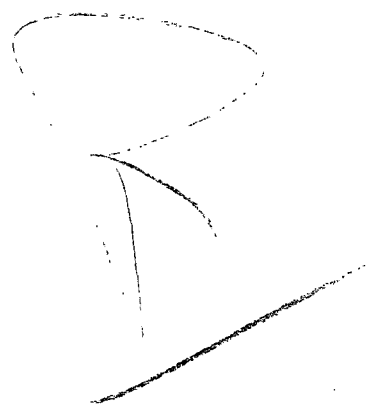

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 92-32

LOCATION CS/2-SW-SW

SEC. 2 TWP. 24 RGE. 11-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Anna Turner

Operator Deep Rock Oil Corp Address Box #429 - Hutchinson - Kansas

Field \_\_\_\_\_ County Stafford

Total Depth 3748 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 10 3/4 - 211 ft. Circulated with cement.  
7" casing set at 3687 ft. Filled back from bottom to  
3675 with chat. 6 sacks of cement blended at 3675 -  
Picked off & pulled the casing. Filled with mud  
to 211 ft. Rock Bridge & 20 sacks of cement at 211 ft.  
Mud to 20 ft. Plug & 10 sacks cement at the surface  
Bill Morgan - Plugging Contractor

RECEIVED 5-9-49

C. M. Stough  
District Conservation Agent

**PLUGGING**  
FILE SEC 2 T 24 R 11  
BOOK PAGE 92 LINE 32  
MAY 9 - 1949  
STATE CORPORATION COMMISSION  
KANSAS

5-6-49