


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

NORTH

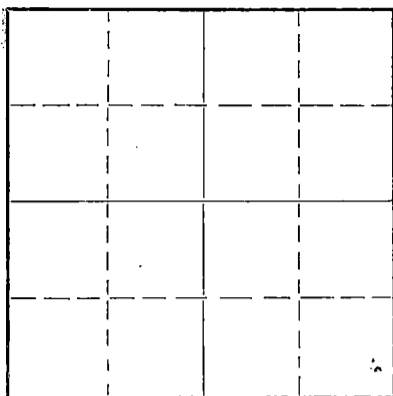

Locate well correctly on above  
Section Plat

Stafford County, Sec 4 Twp 24S Rge 11 (E) W (W)  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines Center E/2 SE SE  
Lease Owner Deep Rock Oil Corporation  
Lease Name Albert Crist Well No. 1  
Office Address Box 1051, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed November 6 19 41  
Application for plugging filed June 4 19 49  
Application for plugging approved June 6 19 49  
Plugging commenced July 5 19 49  
Plugging completed July 8 19 49  
Reason for abandonment of well or producing formation Well went dry

If a producing well is abandoned, date of last production May 15 19 49  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C.D. Stough  
Producing formation Viola Lina Depth to top 3751 Bottom 3764 Total Depth of Well 3764 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
	Cemented from top to bottom			8 5/8"	546'	None
				4 1/2"	3750	2702'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled with chat from 3775' to 3750'. Run three sacks cement from 3750' to 3720'. Filled with mud from 3720' to 260'. Set rock bridge from 260' to 250'. Run 15 sacks cement from 250' to 210'. Filled with mud from 210' to 40'. Set rock bridge from 40' to 30'. Run 10 sacks cement, filled to top of hole and in cellar.

9-10-49

RECORDED  
INDEXED  
SEP 10 1949  
STATE CORPORATION COMMISSION  
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Deep Rock Oil Corporation  
Address Box 429, Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Kansas, ss.  
\_\_\_\_\_  
(employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Jacob Smith

Box 429 Hutchinson, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of September, 1949

Carl J. Rowan  
Notary Public.

My commission expires 11-26-51



Albert Crist #1  
 Sec. 4 Twp. 24S Range 11W  
 Stafford County, Kansas  
 Center E/2 SE SE  
 330 Feet from E. line  
 660 Feet from S. line

## WELL LOG

0	40	Sand and shale
40	140	Sand
140	505	Red Bed
505	538	Sand
538	570	Anhydrite
570	1650	Shale and shells
1650	2140	Limestone
2140	2215	Shale and Lime
2215	2360	Shale
2360	2570	Shale and Lime
2570	2695	Broken Lime
2695	2925	Shale and Lime
2925	3725	Lime
3725	3747	Shale
3747	3749	Lime and Shale
3749	3751	Chert
3751	3764	Lime - Viola - pay
3764		T.D.

Drilled deeper in September 1943.  
 Total Depth 3775'.

3764	Old Total Depth
3764	3767 Lime - Brown-med hard.
3767	3775 Gray Cherty Lime
3775	New Total Depth.

