

2-19

2-070354

STATE CORPORATION COMMISSION
CONSERVATION DIVISION - Plugging Section
200 Colorado Derby Building
Wichita, Kansas 67202

API NUMBER: 15-095-21,208-0000

C NE NW, SECTION 15 TOWNSHIP 27 RANGE 10W

OPERATOR LICENSE # 5992 4950 FEET FROM S SECTION LINE
3300 FEET FROM E SECTION LINE

OPERATOR Patton Oil Company
NAME & 672 West 4th
ADDRESS Hoisington, KS 67544

LEASE NAME: Gridley #1
COUNTY: Kingman
WELL TOTAL DEPTH: PB 4010' 4493'

CONDUCTOR PIPE: " @ ' 146.02
SURFACE CASING: 8-5/8" @ 262'

ABANDONED OIL WELL GAS WELL INPUT WELL SMD D&A

OTHER WELL AS HEREINAFTER INDICATED: _____

PLUGGING CONTRACTOR: Kelso Casing
ADDRESS: Box 347, Chase, KS LICENSE: 6050

COMPANY TO PLUG AT: HOUR: 12:00 DAY: 19 MONTH: 2 YR: 1991

PLUGGING PROPOSAL RECEIVED FROM: Bill Fulls
COMPANY NAME: _____ PHONE: _____

WERE: Plug at 1500' - 35 sx at 1010' - 320' to surface.

PLUGGING PROPOSAL RECEIVED BY: _____

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL () PART () NONE ()

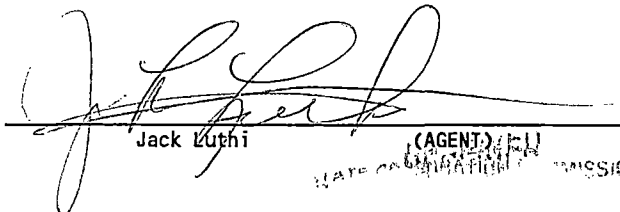
COMPLETED: HOUR: 4:00 DAY: 19 MONTH: 2 YEAR: 1991

ACTUAL PLUGGING REPORT:

There was a cast iron bridge plug set at 1500' -
sanded back to 1560' - 5 sx common - shot 5-1/2" csg
off at 1130' - pulled to 1010' - pumped 35 sx - pulled
to 320' - circ to surface.

REMARKS: Allied #6069 60/40 2%

I DID NOT OBSERVE THIS PLUGGING.


Jack Luthi (AGENT)

STATE CORPORATION COMMISSION FORM CP-2/3
REV. 3/90

MAR 4 1991

CONSERVATION DIVISION
Wichita, Kansas

INVOICED

DATE 3-6-91

INV. NO. 31062

2-19