

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____


LOCATION NE 1/4 SEC 16 T24 R11ESEC. 9 TWP. 24 RGE. 11Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease FiggersOperator Champion Refry Co Address Box #552 - Enid - Okla.Field _____ County StaffordTotal Depth 3815 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4" - 317 ft. Circulated with Cement
4 1/2" casing at 3785 ft. cemented - Lane Wells Plug
Set in the 4 1/2" casing at 2855 ft - 45 sacks cement mixed
on top of Plug - Shot off & Pulled 1800 ft of 4 1/2" casing -
Weld to 200 ft - Bridge & 15 sacks of cement - Weld
to 15 ft - Plug & 10 sacks of Cement -
Whitlock - Pipe Pulling Contractor

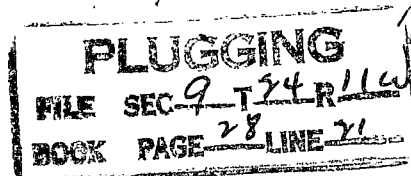

C. M. Strough
District Conservation Agent

Date 5 - 6 - 48

5-10-48