


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required A
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

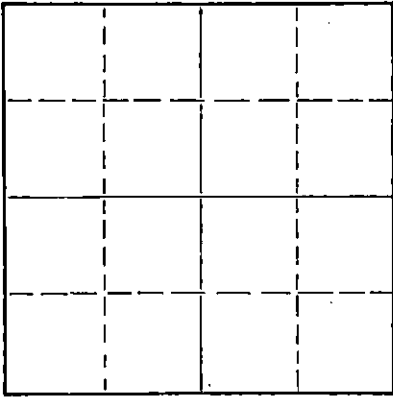

Locate well correctly on above
Section Plat

Stafford County. Sec. 23 Twp. 24 Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines SE NE SE

Lease Owner Theodore Gore

Lease Name Koelsch

Well No. 3

Office Address 400 Brown Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) oil well

Date well completed 5-17-54

19

Application for plugging filed 5-31-56

19

Application for plugging approved 6-6-56

19

Plugging commenced 6-15-56

19

Plugging completed 6-20-56

19

Reason for abandonment of well or producing formation oil exhausted

If a producing well is abandoned, date of last production June 19 56

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well R. M. Brundage

Producing formation Depth to top Bottom Total Depth of Well 3796 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	370	none
				5 1/2	3795	3,021

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3796 to 3720 ft.

Sand

3720 to 3695 ft.

5 sacks cement

Surface hole squeezed with 3 sacks hulls,

3 sacks chloride, 20 sacks mud and 90 sacks cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & S Pipe Pulling Co.
Address Box 192, Ellinwood, KansasSTATE OF Kansas, COUNTY OF Sedgwick ss.
Theodore Gore (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Theodore Gore Operator
400 Brown Building, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of July, 19 56

My commission expires June 7, 1960

Notary Public.

PLUGGING

FILE SEC. 23 T. 24 R. 14W
BOOK PAGE 68 LINE 30

7-7-56

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

Company- HARRY GORE
Farm- Koelsch

No. 3

SEC. 23 T. 24 R. 14W
SE NE SE

Total Depth. 3796'


Comm. 5-7-54

Comp. 5-17-54

Shot or Treated.

Contractor. Veeder Supply & Dev. Co.

Issued. 8-14-54

County Stafford
KANSAS

CASING:

8 5/8" 370' cem w/200 sx
5 1/2" 3795' cem w/100 sx

Elevation. 1935' RB

Production. 193 B0

Figures Indicate Bottom of Formations.

sand	125
shale	190
shale and shells	361
shale	680
sand and shale	750
shale and shells	1700
lime and shale	3130
lime	3205
lime and shale	3260
lime	3490
lime and shale	3630
lime	3796
Total Depth	

Tops:

Anhydrite	817
Heebner	3450
Brown Lime	3583
Lansing-Kansas City	3609

PLUGGING

FILE SEC. 23 T. 24 R. 14W
BOOK PAGE 68 LINE 30

STATE OF KANSAS
JUL 7 - 1954
CONSERVATION DIVISION
Wichita, Kansas