

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Stafford County. Sec. 24 Twp. 24 Rge. 14 (E) (W)
SE NW SW

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Addis Oil Operations
Lease Name Koelsch #6 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 1/4/73 _____ 19____
Plugging completed 1/15/73 _____ 19____
Reason for abandonment of well or producing formation depleted.

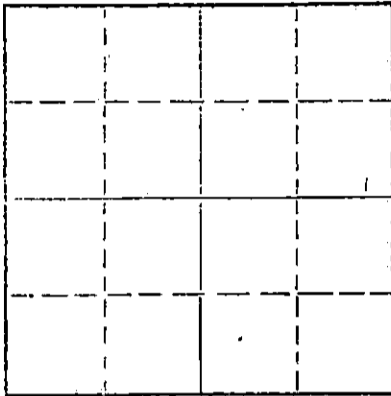

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3900 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	832	none
				5 1/2"	3899'	2690'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked bottom, ran sand to 3650' and dumped 5 sacks of cement.
Shot pipe at 3134', 3035', 2937', 2844', 2735', pulled 64 joints.
Set 10' rock bridge at 360' and dumped 10 sacks of cement. Dumped
6 yards ready mix to plug well.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
FEB 9 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of January, 19 73

My commission expires



[Signature]
Notary Public.

DRILLER'S LOG

Company: Helmerich & Payne, Inc.

SE-NW-SW

Farm: Koelsch Well No: 6
Total Depth: 3900'

Sec: 24, Twn: 24S, Rge: 14

County: Stafford,
Kansas

Comm: 4/18/55 Comp: 4/27/55
Contractor: Peel Brothers, Inc.

Elevation: 1944 G.L.

Casing:

8 5/8" @ 832' Cem: 500 24
5 1/2" @ 3899' Cem: 125 24

Production:

Figures below indicate bottom of formation

Clay	0'	30'
Sand		110
Shale		700
Red-bed		725
Anhydrite		845
Red-bed and shale		1525
Shale and lime		3720
Lime		3855
Lime and shale		3900
Total Depth		3900

This is to certify that the above information is to the best of my knowledge true and correct.

PEEL BROTHERS, INC.

BY *P. E. Sutton*

SUBSCRIBED AND SWORN TO before me this 29 day of April

My commission expires September 28, 1957

Norma L. Rose
Notary Public

RECEIVED
STATE CORPORATION COMMISSION
NOV 21 1972
CONSERVATION DIVISION
Wichita, Kansas