


DISTRICT CONSERVATION AGENT'S REPORT

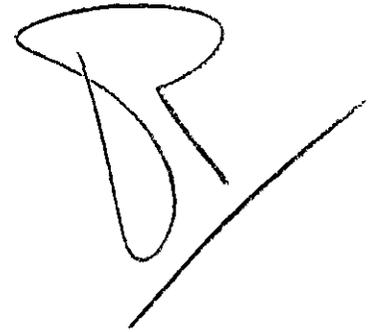

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 70-21

LOCATION CW 1/2 - SE - SE

SEC. 15 TWP. 24 RGE. 11-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 6 Lease U. A. Ferris - "A"

Operator Standard Oil Gas Co Address Box #7 - Ellinwood - Kans.

Field _____ County Stafford

Total Depth 3832 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/8 - 240ft - Circulated with cement -
5 1/2" casing set at 3800ft. Cemented with 100 sacks
cement. Plugged back to 3800ft with chat. 4 sacks of
cement dumped at 3800ft. Shot off & pulled the 5 1/2" casing.
Filled hole with mud to 240ft. Set Rock Bridge & 15 sacks
of cement at 240ft. Mud to 30ft. Plug &
10 sacks of cement at the surface.
Pipe Pulling, Inc. Plugging contractor

4-27-51

RECEIVED
STATE CORPORATION COMMISSION

APR 27 1951

CONSERVATION DIVISION
PLUGGING
FILE SEC 15 T 24 R 11W
BOOK PAGE 70 LINE 21

C. D. Stough
District Conservation Agent

Date 4-28-51