


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

NORTH

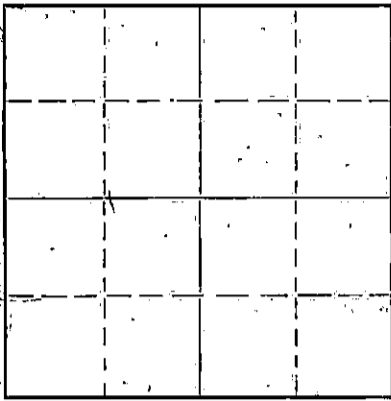

Locate well correctly on above  
Section Plat

Reno..... County. Sec. 1 Twp. 23S Rge. 4W (W)  
Location as "NE/CNW/SW" or footage from lines 2NW/4 SW/4  
Lease Owner Simon Lebow  
Lease Name Haury Well No. #1  
Office Address 608 Oil Capital Bldg., Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed January 5, 1949 19  
Application for plugging filed June 9, 1949 19  
Application for plugging approved June 10, 1949 19  
Plugging commenced June 6, 1949 19  
Plugging completed June 14, 1949 19  
Reason for abandonment of well or producing formation Dry Hole  
If a producing well is abandoned, date of last production..... 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel Durkee  
Producing formation Lims Depth to top 3382 Bottom 3383 Total Depth of Well 3383 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from..... feet to..... feet for each plug set.  
Dumped 6 sacks of cement at 3282'. Shop pipe off at 2344'. Pulled pipe and mudded hole to 325'. Put 15 sacks of cement at 325'. Finished filling hole with mud and dumped 5 sacks of cement at top of surface.

6-23-49

RECEIVED

Conservation Div.

JUN 23 1949

STATE CORPORATION  
COMMISSION  
KANSAS

Correspondence regarding this well should be addressed to Simon Lebow  
Address 608 Oil Capital Bldg., Oklahoma (Tulsa)


STATE OF Oklahoma, COUNTY OF Tulsa, ss.  
Simon Lebow (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Simon Lebow  
608 Oil Capital Bldg., Tulsa, Oklahoma  
(Address)

SUBSCRIBED AND SWORN to before me this 21st day of June, 19 49

My commission expires May 19, 1952

H. Sanders  
Notary Public.



15-155-02750-0000

Simon Lobow et al.  
603 Oil Capital Bldg.  
Tulsa, Oklahoma

SW 1/4, 1-23-48  
County, Reno  
State, Kansas

Haury No. 1

Total Depth 3309  
Comm. 12-9-48 Comp. 12-17-48

	Casing	8 5/8"	445'	com
		5 1/2"	3270'	com
Surface	0	320		
Sand	320	415		
Shale	415	445	Total Surface Depth	
Shale	445	510		
Sandy Shale	510	560		
Shale & Shells	560	675		
Shale, Shells & Lime	675	850		
Shale & Shells	850	915		
Sandy Lime	915	950		
Shale & Lime	950	1065		
Lime & Shale	1065	1210		
Shale	1210	1500		
Lime & Shale	1500	1900		
Shale	1900	2000		
Lime & Shale	2000	2500		
Shale	2500	2625		
Lime & Shale	2625	3170		
Shale & Lime	3170	3270		
Lime	3270	3309	run 5 1/2" O D 14" Casing	
Total Depth	3309			

WIDE OPEN  
APPROXIMATE  
DEPTH

7-23-49

RECEIVED  
COMM. DIV.  
JUL 23 1949  
STATE CORPORATION  
COMMISSION  
KANSAS

PLUGGING  
SEE SEC 1-23-48  
BOOK PAGE 109 LINE 38