

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Stafford County, Sec. 26 Twp. 24S Rgs. (E) 14W (W)

Location as "NE/CNW/SE/SW" or footage from lines N/2 NE SW

Lease Owner GRAVES DRILLING CO., INC.

Lease Name Neill Well No. 1

Office Address 910 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 1-31 19 76

Application for plugging filed 1-31 19 76

Application for plugging approved 1-31 19 76


Plugging commenced 1-31 19 76

Plugging completed 1-31 19 76

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

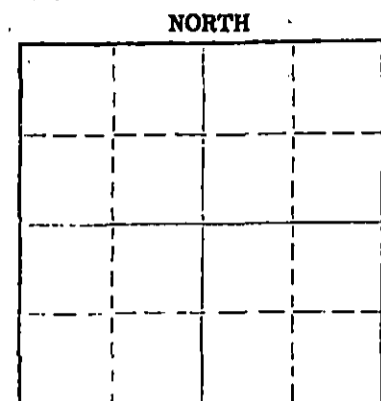

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation Depth to top Bottom Total Depth of Well 4100 feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Shale	Surf	259	8-5/8"	251	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fluid to 250', plug, 35 sx cement;
Fluid to 40, plug, 1/2 sx hulls, 15 sx cement;
Two sacks cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
FEB 9 1976

Name of Plugging Contractor D N B DRILLING, INC. (If additional description is necessary, use BACK of this sheet)

Address 701 First National Building

Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF JAMES L. DONELSON ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
701 First Nat'l Bldg., Wichita, Ks.

Subscribed and sworn to before me this 6th day of Feb. 19 76

My commission expires 8-25-76

Ella Priess
Ella Priess Notary Public.

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

DRILLERS' LOG

GRAVES DRILLING CO., INC.
910 Union Center
Wichita, Kansas 67202

No. 1 Neill
C N/2 NE SW, Sec. 26-24S-14W
Stafford County, Kansas

Elev: 1940 K.B.

Commenced: 1-24-76
Completed: 1-31-76

Surface Casing: 251' of
8-5/8" cemented w/250 ss
common cement, 28 Gel, 38 cc.
1-24-76

<u>FORMATION</u>	<u>DEPTH</u>
Surface Hole	0 - 259
Shale	259 - 440
Shale & Red Bed	440 - 875
Red Bed & Shale	875 - 1360
Shale	1360 - 1865
Shale & Lime	1865 - 2360
Shale	2360 - 2610
Shale & Lime	2610 - 2965
Shale	2965 - 3195
Shale & Lime	3195 - 3690
Lime	3690 - 3870
Shale & Lime	3870 - 3930
Lime	3930 - 4060
Shale	4060 - 4100 RTD

RECEIVED
STATE CORPORATION COMMISSION
FEB 9 1976
CONSERVATION DIVISION
Wichita, Kansas

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 6th day of February, 1976.

Ella Priess
Ella Priess, Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1978