


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

15-079-19057-0000

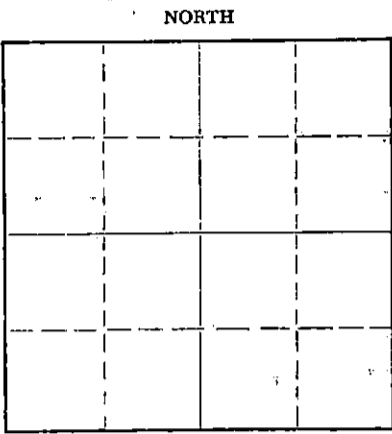

Locate well correctly on above Section Plat

Harvey County, Sec. 18 Twp. 23 Rge. 3W (E) (W)  
Location as "NE/CNW/SW" or footage from lines CW/2 NE NW  
Lease Owner Bennette & Gould  
Lease Name Short Well No. 2  
Office Address 1212 Union Natl Bldg. Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 12-3 1949  
Application for plugging filed Aug 1968  
Application for plugging approved Aug 1968  
Plugging commenced Sept 6 1968  
Plugging completed Sept 9 1968  
Reason for abandonment of well or producing formation Went dry

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott  
Producing formation Depth to top Bottom Total Depth of Well 3373' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		<del>###</del> 3010'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3373' to 3300'. Dumped 5 sx of cement. Mudded hole to 240'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 12 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Art Lamb Casing Pulling Co.  
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.  
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Art Lamb*  
2809 King St. Hutchinson, Kansas 67501  
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of September, 1968

My commission expires January 5, 1970

*Judy Lamb*  
Notary Public.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

COPY

15-079-19057-0000


Company - H. C. BENNETT  
Farm - Short

No. 2

SEC. 18 T. 23 R. 3W  
CW/2 NE NW

Total Depth. 3373  
Comm. 11-21-49 Comp. 12-3-49  
Shot or Treated.  
Contractor.  
Issued. 2-4-50

County. Harvey  
KANSAS



CASING:

8 5/8" 24.8' cem w/200sx.  
5 1/2" 3324' cem w/40' sx.

Elevation. \_\_\_\_\_

Production. Phys. 50 bbls.

Figures Indicate Bottom of Formations

sand, shells	250
shale, shells	790
lime, shale	935
shale sdy, lime	1030
lime	1095
lime, shale	2075
lime	2180
lime, shale	2620
lime	2830
lime, shale	2874
lime	2940
lime, shale	2995
lime	3001
lime, shale	3278
lime	3328
lime, chat	3331
lime	3373
Total depth	

Tops:  
Mississippi 3278

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 29 1968  
CONSERVATION DIVISION  
Wichita, Kansas