


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:

Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Form CP-4

WELL PLUGGING RECORD 15-679-19129-0000

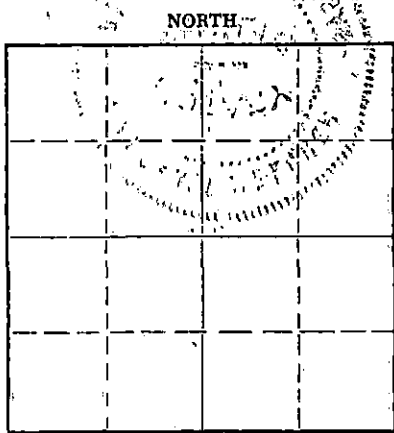

Locate well correctly on above
Section Plat

Harvey County, Sec. 31 Twp. 23S Rge. 3 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NW/4 330' EWL 660' SNL
Lease Owner Home Stake Production Company
Lease Name Brilhart "B" Well No. 0-15
Office Address Burrton, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 6/20/68 19
Plugging completed 6/24/68 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Scott
Producing formation Depth to top Bottom Total Depth of Well 3365 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	507'	none
				5 1/2"	3330'	2464'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3365', ran sand to 3320' and dumped 5 sacks of cement. Loaded hole, shot pipe at 2470', worked pipe loose and pulled 78 joints. Set rock bridge from 310 to 300' and dumped 35 sacks of cement. Mudded hole to 40', set 10' rock bridge and dumped 15 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JUN 28 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

CHASE, KANSAS
(Address)

Subscribed and sworn to before me this 25 day of June, 1968

My commission Expires February 15, 1971

Notary Public.



Burton Office

15-079-19129-0000

RECEIVED
STATE CORPORATION COMMISSION
MAY 22 1968
CONSERVATION DIVISION
Wichita, Kansas

Notary Public