

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

NORTH

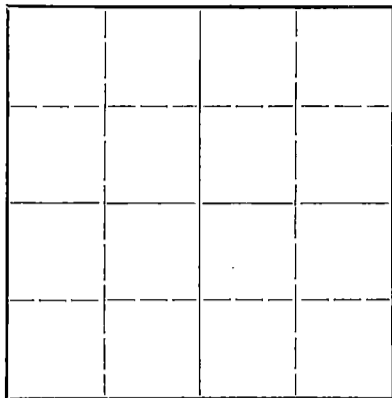

Locate well correctly on above
Section Plat

Reno County. Sec. 12 Twp. 23 Rge. (E) 4 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE 1/4
Lease Owner Louis Kahan & Producers Pipe & Supply Co. (K & P Oil Co)
Lease Name Tetin Well No. 10
Office Address P.O. Box 682, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed June 22 19 49
Application for plugging filed March 11 19 50
Application for plugging approved March 17 19 50
Plugging commenced ~~#####~~ March 30 19 50
Plugging completed April 1 19 50
Reason for abandonment of well or producing formation Did not produce in
paying quantities.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

T.D. 3410', 7" csg. @ 3309', 10-3/4" csg. @ 311'
P.B. with sand from 3410' to 3300' & cement to 3270' - 6 sks.
Fill with mud from 3270' to 300' & cement to 260' - 20 sks.
Fill with mud from 260' to 10' & cement to cellar - 5 sks.
Pull 2632' of 7" csg. 10-3/4" csg. left in (cemented)

4-24-50


(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Louis Kahan
Address P.O. Box 682, Tulsa, Okla.

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
Louis Kahan (Signature) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. Kahan
Tulsa, Okla. (Address)

SUBSCRIBED AND SWORN to before me this 20th day of April, 19 50
R. Williams Notary Public.

My commission expires May 20, 1950



Well Log

K & P Oil Co.
Tetin #10

Sec. 12-23S-4W
SE/4 Reno County, Kansas

Total Depth: 3310'

Top Mississippi 3290'

Comm: 6-6-49 Comp: 6-22-49

Casing
10" set at 311'
7" set at 3309'

Cement
225 Sacks
50 Sacks

Formation	Depth
Sand Red Bed	300
Red Rock & Lime	313
Shale & Lime	499
Lime	685
Lime	790
Lime & Shale	925
Lime	1190
Lime & Shale	2085
Lime	2367
Lime & Shale	2437
Lime	2516
Lime & Shale	2760
Lime	2802
Lime & Shale	3006
Lime	3140
Lime & Shale	3310

RECORDED
APR 6 1950
SEC. 12-23S-4W
SE/4 RENO COUNTY
KANSAS

PLUGGING
FILE SEC-12-T-23-R-4W
BOOK PAGE-143-LINE-16

State of Kansas
Russell County

I hereby certify that the above information is true and correct to the best of my knowledge.

RECEIVED

Conservation Div.

Signed: Mary Lois Parkhurst

MAR 16 1950

Subscribed and sworn to before me this 30th day of June 1949.

STATE COMMISSION

My commission Expires 6-17-50

Signed: Clara Hummel, Notary Public