

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas


OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Reno County. Sec 12 Twp 23 Rge (E) 4 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE NW NE
Lease Owner Louis Kahan & Producers Pipe & Supply Co. (K & P Oil Co.)
Lease Name Tetin Well No 11
Office Address P.O. Box 682, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed July 7 19 49
Application for plugging filed March 11 19 50
Application for plugging approved March 17 19 50
Plugging commenced April 4 19 50
Plugging completed April 7 19 50
Reason for abandonment of well or producing formation Was not producing in paying quantities.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

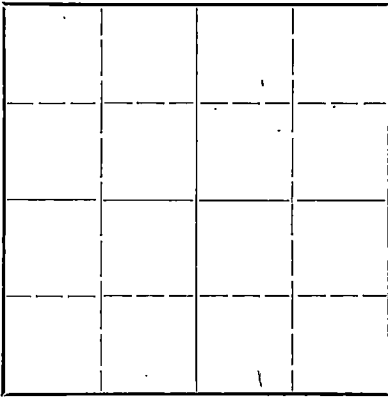

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

T.D. 3387', 7" csg. @ 3301', 10-3/4" csg. @ 341'
P.B. with chat to 3300' & cement to 3265' (with 6-sks.)
Fill with mud to 335' & cement to 300' (with 20-sks.)
Fill with mud to 10' & cap to cellar (with 5 sks.)
Pull 2791' of 7" csg., 10-3/4" left in cemented.

Above work done by Morgan Well Plugging Service, Hutchinson, Kansas

4-24-50

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Louis Kahan
Address P.O. Box 682, Tulsa, Okla.

APR 24 1950

STATE OF Okla., COUNTY OF Tulsa, ss. Louis Kahan
(operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L. Kahan*

(Address)

SUBSCRIBED AND SWORN to before me this 20th day of April, 19 50

R. William
Notary Public.

My commission expires

PLUGGING
FILE SEC-12 T 23 R 40
BOOK PAGE 143 LINE 15

Well Log

K & P Oil Company
Tetin #11

Sec. 12-23S-4W
Reno County, Kansas

Total Depth: 3370'
Comm: 6-23-49, Comp. 7-7-49

Casing

10" Set 345'
7" Set 3301'

Cement

250 Sacks
100 Sacks

Formation:	Depth:
Sand & Shale	225'
Sand & Shale	347
Shale	510
Top of Anahdrite-Lime	520
Lime & Shale	1585
Shale & Lime	1750
Lime & Shale	1855
Lime	1905
Lime & Shale	2520
Shale & Shells	2570
Lime & Shale	2666
Lime	2994
Lime & Shale	3225
Shale, Lime & Shells	3279
Lime & Shale	3290
Lime & Churt	3297
Lime & Chat	3370

State of Kansas
Russell, County

I hereby certify that the above information is true and correct to
the best of my knowledge.

Signed: Violet R. Keller

RECEIVED
APR 15 1950

Subscribed and sworn to before me this 14th day of July, 1949

My commission expires 6-17-50

Signed: Clara Hummel, Notary Public

