


15-155-20069-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

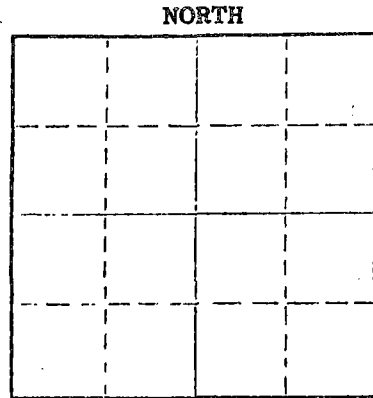

Locate well correctly on above Section Plot

Reno County, Sec. 23 Twp. 23 Rge. 4 W (E) (W)  
Location as "NE/CNW/SW" or footage from lines N/2 NW NE  
Lease Owner R. L. Evans Trust  
Lease Name Evans "B"  
Office Address 3803 Panorama Dr. Hutchinson, Kansas 67501  
Character of Well (completed as Oil, Gas or Dry Hole) SWD  
Date well completed 7-30 19 68  
Application for plugging filed July 1974  
Application for plugging approved July 19 74  
Plugging commenced Aug 15 19 74  
Plugging completed Aug 20 19 74  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation Depth to top Bottom Total Depth of Well 3400'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		932'
				8 3/8"		350'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made a bridge at 950' on top of tubing. Dumped 5 sacks of cement. Mudded hole to 215'. Made 15' of rock bridge. Dumped 4 Yrds. of Ready-Mix cement, filling to the bottom of the collar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Inc.  
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno ss.  
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb  
2809 King St. Hutchinson, Kansas 67501  
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of August, 1974

My commission expires December 31, 1977  
Notary Public.

**KANSAS GEOLOGICAL SOCIETY  
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
KANSAS GEOLOGICAL SOCIETY BUILDING  
508 EAST MURDOCK - WICHITA, KANSAS**

**COPY**

COMPANY **TOMLINSON OIL**

SEC. 23 T. 23R. 4W

FARM **Evans "B"**

NO. **7**

LOC. **N½ NW NE**

**15-155-20069-0000**

TOTAL DEPTH **3400'**

COMM. **7-25-68**


COMP. **7-30-68**

SHOT OR TREATED

CONTRACTOR **Graves Drilling**

ISSUED **10-5-68**

COUNTY **Reno**



CASING

20	10 3/4"	250'	cem w/	275 sx
15	8 5/8"	670'	cem w/	100 sx
12	6			
13	5 1/2"	3399'	cem w/	100 sx

ELEVATION **1470'**

PRODUCTION **IJW M188 3302-56**

FIGURES INDICATE BOTTOM OF FORMATIONS

0	-	25	Sod, clay & sand
25	-	250	Shale & sand
250	-	349	Shale
349	-	672	Shale & salt
672	-	1080	Shale & lime
1080	-	1140	Lime & shale
1140	-	1577	Shale & lime
1577	-	1615	Lime & shale
1615	-	1970	Shale, sand & lime
1970	-	2220	Shale & lime
2220	-	2330	Lime
2330	-	2505	Shale, lime & sandy shale
2505	-	2978	Lime
2978	-	3007	Shale & lime
3007	-	3185	Lime & shale
3185	-	3314	Lime
3314	-	3400	Lime & chert
3400			Rotary Total Depth

**RECEIVED  
STATE CORPORATION COMMISSION  
AUG 2 1974  
CONSERVATION DIVISION  
Wichita, Kansas**

TCPS: SMP	
Tarkio	1598
Elmont	1656
Mississippi	3246
TD	3400