


15-155-20204-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely.
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Reno County, Sec. 22 Twp. 23 Rge. 4 E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines
NE NE SW
Lease Owner A. Scott Ritchie
Lease Name Dillingham #1 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____

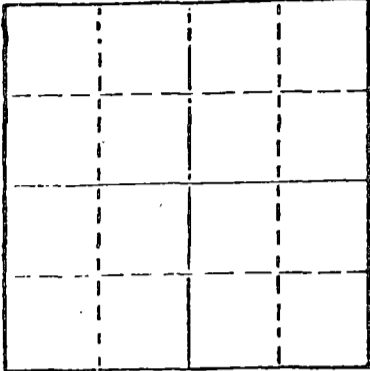

Locate well correctly on above
Section Plat

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 1/31/78 _____ 19____
Plugging completed 2/10/78 _____ 19____
Reason for abandonment of well or producing formation
depleted.
If a producing well is abandoned, date of last production
_____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3430
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	225	none
				8-5/8	625	435'
				5 1/2"	3427	2745'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded to 3200' and ran 5 sacks cement. Shot pipe at 2725', pulled 86 joints of 5 1/2" casing. Pulled 2" tension on 8-5/8", checked hole and found mud at 400', pumped 35 barrels salt water down 8-5/8". Shot pipe at 460', 433', pulled 16 joints of 8-5/8" casing. Pumped 10 sacks hulls, 25 sacks gel, plug and 5 sacks hulls, 150 sacks cement, 50-50, 2% gel.

PLUGGING COMPLETE.

STATE OF KANSAS
FEB 15 1978

(If additional description is necessary, use BACK of this sheet.)


Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of Feb., 1978

My commission expires



Margaret Melcher
Notary Public.