

15-155-20167-0000

JAN 15 1975

Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD
Conservation Division
Wichita, Kansas

Reno County, Sec. 22 Twp. 235 Rge. 4W (E) (W)

Location as "NE/CNW/SW" or footage from lines C E/2 SE NW
Lease Owner TGT Petroleum Corporation
Lease Name Regier Well No. 1
Office Address 209 E. William Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 14 19 70
Application for plugging filed December 14, 1970 & January 3 19 75
Application for plugging approved December 14 19 70
Plugging commenced December 14, 1970 & December 23 19 74
Plugging completed December 14, 1970 & December 27 19 74
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes - 1970 No - 1974

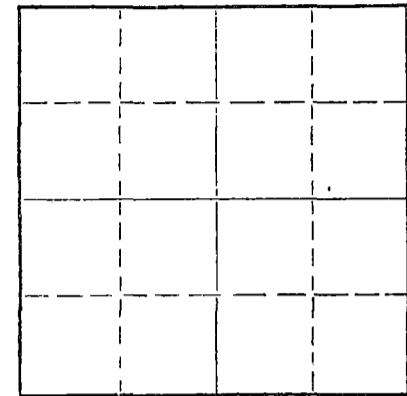

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3377 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	216	None
				8-5/8	632	302

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

December 14, 1970 - Ran measuring line - Fluid at 380' - Pushed plug to 600' and cemented with 25 SXS through drill pipe.

December 27, 1974 - Ran wire line down hole, Stopped at 253', Bailed 20' to 15' of mud out. Shot pipe at 350', 300', pulled 9 joints. Bailed fluid out of 10-3/4" down to 200' to 210' and made bridge, dumped 35 sacks of cement. Made another bridge of 30' to 40' and dumped 15 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sage Drilling Jim Pipe Pulling
Address Wichita, Kansas Chase, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

B. Lynn Herrington

(employee of owner) or (~~owner~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

B. Lynn Herrington
209 E. William, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 8th day of January, 19 75

Wanda L. Hiebert
Wanda L. Hiebert
Notary Public.

My commission expires November 10, 1977

DRILLERS LOG

15-155-20167-00000

REGIER NO. 1

CASING RECORD: OPERATOR: Rosen Oil Corporation DESCRIPTION:
 10-3/4" @ 229'
 w/225 sax cement CONTRACTOR: Sage Drilling Co., Inc. C E/2 SE NW
 8-5/8" @ 614' COMMENCED: December 6, 1970 Sec. 22-23S-4W
 w/100 sax cement Reno County,
 Kansas
 TOTAL DEPTH: ELEVATION:
 3377' COMPLETED: December 14, 1970 1480KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	40	
Shale	40	614	
Shale & Lime	614	835	
Lime & Shale	835	1625	
Sand & Lime	1625	1975	
Shale & Lime	1975	2325	
Lime & Shale	2325	2469	
Sand & Lime	2469	2565	
Lime & Shale	2565	2875	
Lime	2875	3190	
Shale & Lime	3190	3355	
Lime	3355	3377	D&A

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 6 1975
 CONSERVATION DIVISION
 Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By *F.M. M. Coughlin*



Subscribed and sworn to before me this 16th day of December, 1970.

Louise K. Whitted
 Louise K. Whitted, Notary Public

My commission expires:
 November 26, 1974.