


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

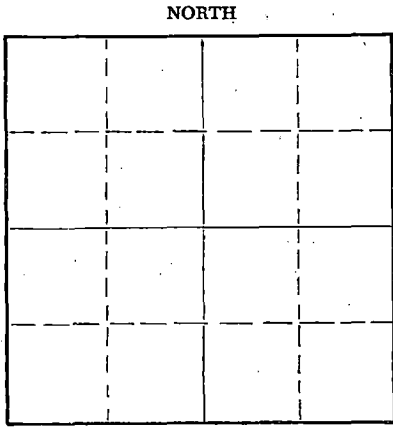

Locate well correctly on above Section Plat

Edwards County, Sec. 19 Twp. 24 Rge. 18W (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE NW
Lease Owner Bennett & Roberts Drilling Co.
Lease Name Huff Well No. 1
Office Address Russell, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3/4 19 56
Application for plugging filed 3/4 verbally 19 56
Application for plugging approved 3/4 verbally 19 56
Plugging commenced 3/4 19 56
Plugging completed 3/4 19 56
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Depth to top Bottom Total Depth of Well 4988 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	321'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

20 sacks cement and 1/3 sack hulls @ 280'. Second plug set @ 35' w/10 sacks cement and 1/3 sack hulls.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address


STATE OF KANSAS, COUNTY OF RUSSELL, ss.
Ruben Eichman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rubén Eichman
Russell, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of March, 19 56

Clara Thurmond
Notary Public.

My commission expires 6/17/58



MAR 7 - 1956 3-7-56
CONSERVATION DIVISION
Wichita, Kansas

Bennett & Roberts Drilling Co.
Huff #1

NE NE NW 19-24-18W
Edwards Co., Kans.

R.T.D. 4988'

Commenced 2/13/56
Completed 3/4/56

Casing Record

8 5/8" Set @ 321' w/225 sx cmt.

----- Figures Indicate Bottom of Formation -----

Surface Sand & Gravel	125
Shale & Sand	175
Sand	200
Grey Shale	321
Grey Shale & Shells	420
Red Bed	609
Anhydrite	625
Shale & Shells	710
Sand	760
Shale, Sand & Shells	1130
Shale & Shells	1190
Anhydrite	1215
Shale & shells	1661
Lime & Shale	2338
Lime	2370
Lime & Shale	2460
Lime	2490
Shale & Lime	3295
Lime	3480
Lime & Shale	3530
Lime	4398
Lime, Sand & Shale	4463
Lime, Sand & Chert	4522
Cherty Miss.	4580
Chert & Shale	4586
Sand	4600
Hard Sand	4602
Sand & Shale	4638
Lime	4658
Lime & Chert	4717
Lime	4808
Lime, Strks hard sand & Shale	4831
Lime	4851
Lime & Streaks Chat	4908
Sandy Shale	4938
Lime	4988

STATE OF KANSAS)
RUSSELL COUNTY)

PLUGGING
FILE SEC 19 T 24 R 18W
BOOK PAGE 43 LINE 43

I hereby certify that the above information is correct to the best of my knowledge.

BENNETT & ROBERTS DRILLING CO.

By *Gene Lake*

Subscribed and sworn to before me this 6th day fo March, 1956.

Clara Hummel
Notary Public

My Commission Expires 6/17/58