

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-21272-00-00
Spot: CNENENW Sec/Twnshp/Rge: 1-27S-8W
4950 feet from S Section Line, 990 feet from E Section Line
Lease/Unit Name: STUCKY Well Number: 3-C
County: KINGMAN Total Vertical Depth: 3720 feet

Operator License No.: 6139
Op Name: BOYER, JAY C.
Address: PO BOX 511
HAYS, KS 67601

Conductor Pipe: Size feet: 8120.90
Surface Casing: Size 8.625 feet: 206 150 SX CMT
Production: Size 4.5 feet: 3718 150 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 10/26/2001 10:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MONTY Company: MIKES TESTING & SALVAGE Phone: (316) 938-2943

Proposed Plugging Method: Sand to 3500' and 4sxs. 35sxs-1350', 35sxs-900', 260'-0'

Plugging Proposal Received By: JACK LUTHI Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 10/26/2001 4:30 PM KCC Agent: JACK LUTHI

Actual Plugging Report:

Sanded bottom to 3500' and 4sxs of common. Shot 4 1/2" casing off at 2150. Pulled to 1350', pumped 35sxs, pulled to 900', pumped 35sxs, pulled to 260'. Pumped cement to surface.

RECEIVED
KCC DISTRICT #2

NOV 02 2001

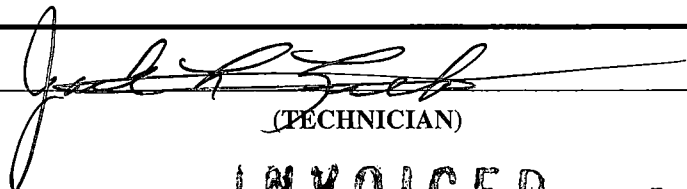
WICHITA, KS

Remarks: UNITED # 3440 60-40 4% GEL

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

INVOICED

Form CP-2/3

DATE 11-14-01

INV. NO. 2002060934