

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-01330-00-01
Spot: NWSENW Sec/Twnshp/Rge: 35-28S-6W
3630 feet from S Section Line, 3630 feet from E Section Line
Lease Name: KOSTNER Well #: 1
County: KINGMAN Total Vertical Depth: 3818 feet

Operator License No.: 34848
Op Name: POLLOK ENERGY, LLC
Address: 501 N. 4TH PO BOX 106
PURCELL, OK 73080

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	210		40 SX

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 04/15/2016 12:00 PM
Plug Co. License No.: 34082 Plug Co. Name: ALLIANCE WELL SERVICE INC.
Proposal Rcvd. from: DAVID HICKMAN Company: POLLOK Phone: _____

Proposed
Plugging
Method:

AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 04/15/2016 5:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

SET CIBP AT 3514', AND CAPPED WITH 2 SKS OF CEMENT. THE CASING WAS RECOVERED FROM 2404', AND PULLED FROM THE WELLBORE. TUBING WAS RUN TO 812', WHERE 35 SKS OF CEMENT WAS SPOTTED. THE TUBING WAS PULLED TO 422', WHERE 35 SKS OF CEMENT WAS SPOTTED. TUBING PULLED TO 260', WHERE CEMENT WAS CIRCUALTED TO SURFACE WITH 200 SKS OF CEMENT.

Perfs:


Top	Bot	Thru	Comments
3564	3568		

Remarks: BASIC SERVICES COMMON AND 60/40

Plugged through: TBG

District: 02

Signed _____

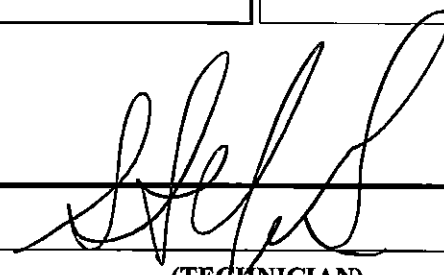

(TECHNICIAN)

Received
KANSAS CORPORATION COMMISSION

APR 26 2016

CONSERVATION DIVISION
WICHITA, KS

154

Form CP-2/3

NO 5-6-16