

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-21360-00-00
Spot: NENE Sec/Twnshp/Rge: 10-29S-10W
4620 feet from S Section Line, 660 feet from E Section Line
Lease Name: ALBERS D Well #: 1
County: KINGMAN Total Vertical Depth: 2612 feet

Operator License No.: 3273
Op Name: HERMAN L. LOEB, LLC
Address: PO BOX 838
LAWRENCEVILLE, IL 62439

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2612	1725	175 SX
PROD	4.5	2653		175 SXS CMT
SURF	8.625	332		100 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/28/2016 12:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE INC Phone: (316) 215-1873

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/29/2016 12:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 2445', AND CAPPED WITH 4 SKS OF CEMENT. CASING WAS RECOVERED FROM 1725 AND PULLED TO 1500', WHERE 35 SKS OF CEMENT WAS SPOTTED. PULLED CASING TO 1000' AND SPOTTED 35 SKS OF CEMENT. PULLED CASING TO 350' AND CIRCUALTED CEMENT TO SURFACE.

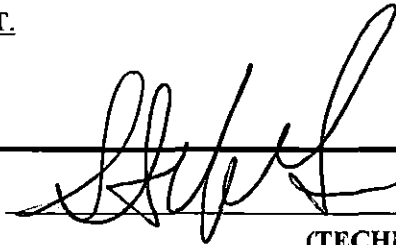
Perfs:

Top	Bot	Thru	Comments
2516	2532		

Remarks: COPELAND CEMENT, COMMON CEMENT.

Plugged through: CSG

District: 02

Signed  (TECHNICIAN)

Received
KANSAS CORPORATION COMMISSION
MAY 04 2016
CONSERVATION DIVISION
WICHITA, KS

720
5-6-16