


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

### WELL PLUGGING RECORD

Kingman County. Sec. 33 Twp. 28 Rge. 7 (E) 1/W  
Location as "NE/CNW/SW" or footage from lines 150' E of C of SE NW  
Lease Owner Sooner Pipe & Supply  
Lease Name Licklider Well No. 1  
Office Address Box 574, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) d & a  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 2-4 1963  
Application for plugging approved 2-5 1963  
Plugging commenced 2-5 1963  
Plugging completed 2-6 1963  
Reason for abandonment of well or producing formation D & A

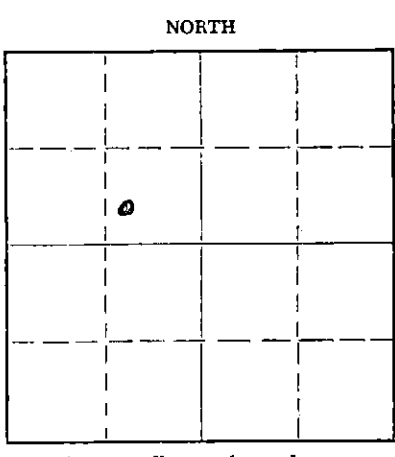

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Herman Justus  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4412 Feet  
Show depth and thickness of all water, oil and gas formations.

| OIL, GAS OR WATER RECORDS |         |      |    | CASING RECORD |        |            |
|---------------------------|---------|------|----|---------------|--------|------------|
| FORMATION                 | CONTENT | FROM | TO | SIZE          | PUT IN | PULLED OUT |
|                           |         |      |    | 8 5/8         | 257    | circulated |
|                           |         |      |    | 4 1/2         | 4412   | 3422       |
|                           |         |      |    |               |        |            |
|                           |         |      |    |               |        |            |
|                           |         |      |    |               |        |            |
|                           |         |      |    |               |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole from 3905 to 3760 with gravel, dumped 3 sacks cement with dump bailer. Set 15 foot rock bridge at 200 feet. Filled with 4 yards of ready mix to surface.

There was a cast iron bridge plug set at 3905 feet. Top of perforation was at 3766 feet.

RECEIVED  
STATE CORPORATION COMMISSION

FEB 14 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF Kansas, COUNTY OF Butler, ss. \_\_\_\_\_ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Mary Payne  
(Address) \_\_\_\_\_

SUBSCRIBED AND SWORN TO before me this 13th day of February, 1963

My commission expires Jan 18, 1963  
Ethelene E. Phillips Notary Public.

