


15-095-20422-0000

Form CP-3

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217

WELL PLUGGING RECORD

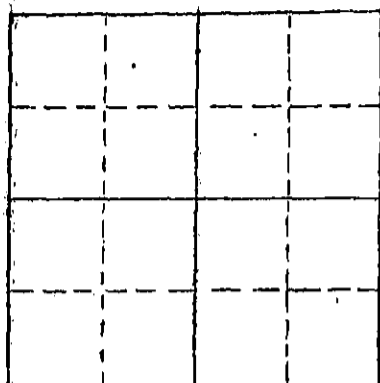

Locate well correctly on above Section Plat

Kingman County, Sec. 25 Twp. 28S Rge. (E) 6 (W)  
Location as "NE/CNW/SE/SW" or footage from lines C NW NE  
Lease Owner Gear Petroleum Co.  
Lease Name Kostner Well No. 1  
Office Address Vickers-KST&B Building, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed September 28, 1975  
Application for plugging filed September 28, 1975  
Application for plugging approved September 28, 1975  
Plugging commenced September 28, 1975  
Plugging completed September 28, 1975  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein, Attica, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 3935 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	224'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up with heavy mud to 200'. Followed by wooden plug and 1/2 sack hulls. Placed 35 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed by wooden plug, 1/2 sack hulls and 15 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION

OCT 24 1975

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Graves Drilling Co., Inc. (If additional description is necessary, use BACK of this sheet)  
Address 910 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.  
John C. Graves (employen of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves  
910 Union Center, Wichita, Kansas 67202 (Address)

Subscribed and Sworn to before me this 1st day of October, 1975

My commission expires May 9, 1979

Betty Brandt  
Betty Brandt Notary Public

15-095-20422-0000

ROTARY DRILLERS' LOG

OPERATOR: Gear Petroleum Co. DRILLING COMMENCED: September 20, 1975  
 Vickers-KSB&T Building  
 Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: September 28, 1975  
 910 Union Center  
 Wichita, Kansas 67202

CASING RECORD: 7 Jts. 224' 8-5/8" LOCATION: Kostner No. 1  
 cemented with 160 sacks. C NW NE  
 Section 25-28S-6W  
 Kingman County, Kansas

-----

0 - 224 Red bed & shale  
 224 - 488 Shale  
 488 - 805 Shale & shells  
 805 - 1290 Shale, shells & lime streaks  
 1290 - 1490 Shale  
 1490 - 1805 Lime  
 1805 - 2067 Lime, shale & sand  
 2067 - 2460 Lime & shale  
 2460 - 2643 Lime, shale & sand  
 2643 - 3078 Shale & lime  
 3078 - 3195 Lime, shale & sand  
 3195 - 3380 Lime & shale  
 3380 - 3480 Lime with chert  
 3480 - 3635 Lime, chert & shale  
 3635 - 3708 Lime  
 3708 - 3790 Lime & shale  
 3790 - 3885 Lime, chert & pyrite  
 3885 - 3904 Lime & chert  
 3904 - 3935 Chert  
 3935 Rotary Total Depth

RECEIVED  
 STATE CORPORATION COMMISSION  
 OCT 2 1975  
 CONSERVATION DIVISION  
 Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By John Graves

STATE OF KANSAS )  
 ) ss.  
 SEDGWICK COUNTY )

Subscribed and sworn to before me, a Notary Public, this 1st day of October, 1975.

My commission expires: May 9, 1979.

Betty Brandt  
 Betty Brandt Notary Public