


15-095-01061-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

### WELL PLUGGING RECORD

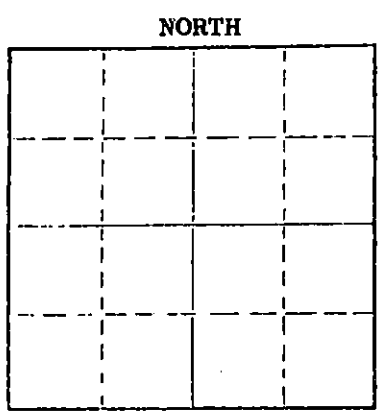

Locate well correctly on above Section Plat

Kingman County. Sec. 21 Twp. 28 Rge. 5 W (E) (W)  
 Location as "NE/CNW/SE/SW" or footage from lines SE/NE/SW  
 Lease Owner: Icar Addison  
 Lease Name: Broadway Well No. 2  
 Office Address: 5307 E Central, Wichita, Kansas 67208  
 Character of Well (completed as Oil, Gas or Dry Hole) oil  
 Date well completed 11-29 19 50  
 Application for plugging filed 6-26 19 74  
 Application for plugging approved 6-27 19 74  
 Plugging commenced 7-12 19 74  
 Plugging completed 7-16 19 74  
 Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Eugene Biberstein  
 Producing formation: Depth to top: Bottom: Total Depth of Well: 3810' Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
						3337'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3810' to 3450'. Dumped 5 ax of cement. Mudded hole to 250'. Made 10' of rock bridge. Dumped 25 ax of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 ax of cement, filling to the bottom of the cellar.

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor: Art Lamb Casing Pulling Co.  
 Address: 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Rene ss.  
 Art Lamb (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
 2809 King St. Hutchinson, Kansas 67501  
 (Address)

SUBSCRIBED AND SWORN TO before me this 15th day of July, 1974

My commission expires December 31, 1977  
[Signature] Notary Public.

15-095-01061-0000

Broadway #2  
Owner: Earl F. Wakefield  
Contractor: Earl F. Wakefield  
Comm: 11-14-50 Comp: 11-29-50

SE NE NW  
21-28-5W  
Kingman County, Kansas  
Casing: 127' of 8 5/8" w/100  
3810' of 6 1/2" w/75  
3810'

Elevation 1581

Surface	1355
Red Bed	1470
Shale	585
Shale & Shell	1125
Lime	1225
Lime & Shale Streaks	1328
Lime	1530
Shale	1685
Shale & Lime	1675
Shale	2000
Shale & Lime	2345
Shale & Shells	2595
Lime & Shale	2740
Lime	2842
Lime & Shale	3275
Lime & Chert	3525
Lime & Shale	3703
Lime	3790
Chat	3804
Lime	3810
TD	3810

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 26 1974  
CONSERVATION DIVISION  
Wichita, Kansas

Tops:

Mississippi Lime	3783
Chat	3790
Dolomite	3804

3783  
3790  
3804

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK )

I hereby certify that the above is a true and correct copy of the log of the Broadway #2 well located SE NE NW 21-28-5W, Kingman County, Kansas.

Earl F. Wakefield

Subscribed and sworn to before me this 30th day of November 1950

B. Jerome Jeffrey

My Commission Expires: 12-23-50