


15-095-01497-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

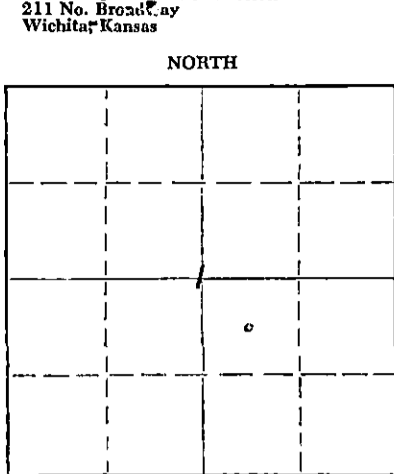

Locate well correctly on above Section Plat

Kingman County, Sec. 1 Twp. 27S Rge. 8W (E) (W)
Location as "NE/CNWxSWx" or footage from lines. G NW SE
Lease Owner: Sunray Mid-Continent Oil Company
Lease Name: Elmer Denison Unit Well No. 1
Office Address: 321 West Douglas - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 6, 1960 19
Application for plugging filed July 6 19 60
Application for plugging approved July 6 19 60
Plugging commenced July 6 19 60
Plugging completed July 6 19 60
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production ---- 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel
Producing formation None Depth to top Bottom Total Depth of Well 3680 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Kansas City	Dry	3270	T.D.	8-5/8"	308'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud from 3680' to 300'. Set 1/4 sk of hulls and Halliburton plug @ 300'. Filled hole with 35 sacks cement from 300' to 192'. Followed with mud to 35' then 1/4 sk hulls and Halliburton plug at 35'. Used 10 sacks cement from 35' to top of surface pipe.

RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1960

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stickle Drilling Company
Address Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Nash A. Gough (employee of owner) or owner/operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Nash A. Gough
321 West Douglas - Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 12 day of July, 1960

My commission expires 7-13-63 Notary Public.



15-095 01497-0000

Sunray Mid-Centinent Oil Company
Tulsa, Oklahoma

Tulsa, Oklahoma
July 11, 1960

Contractor: Stickle Drilling Company
Date Commenced: June 29, 1960
Date Completed: July 6, 1960

Elmer Denison No. 1
S/2 Section 1-278-8W
Kingman County, Kansas

DRILLER'S LOG

Depth Figures Indicate Depth of Formations:

Sand and Red Bed	30
Red Bed and shells	400
Shale and shells	1150
Lime and shale	2170
Shale and lime	2700
Shale	2760
Lime and shale streaks	2870
Lime and shale	3192
Shale and lime	3255
Lime	3680 TD

I, Fred E. Stickle, hereby certify the above to be a true and complete Driller's Log of Sunray Mid-Centinent Oil Company's Elmer Denison Well No. 1, S/2 of Section 1-278-8W, Kingman County, Kansas.

Fred E. Stickle
Fred E. Stickle

Edith A. Lawrence
Notary Public

My commission expires March 24, 1960