


15-095-20714-000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 7 Twp. 27S Rge. 9W ~~XXX~~
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
SW SW SW
Lease Owner Patton Oil Co.
Lease Name Bradshaw "A" Well No. 1
Office Address 5660 So. Syracuse Circle, Englewood, Colo
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry hole

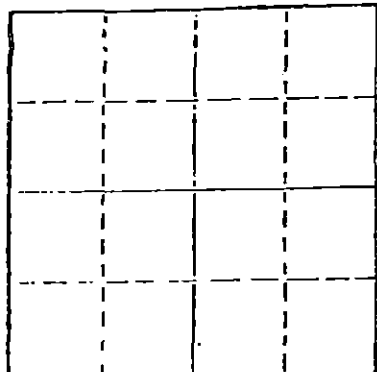

Locate well correctly on above
Section Plot

Date Well completed May 1, 1978
Application for plugging filed Verbal Application 19____
Application for plugging approved Verbal Approval 19____
Plugging commenced May 1, 1978
Plugging completed May 1, 1978
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2235'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 255' | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 2235 feet (rotary total depth) to 240 feet. Set plug at 240 feet and cemented with 35 sacks cement.
Filled hole with heavy rotary mud from 240 feet to 40 feet.
Set solid plug at 40 feet and cemented to cellar with 12 sacks cement, 3 sacks cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

MAY 15 1978


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.
Box 31, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (sole agent of owner) ~~xxxxxx~~ ~~xxxxxx~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 12th. day of May, 19 78



Elsie Willison
Notary Public.

My commission expires June 30, 1978

KANSAS DRILLERS LOG

COMPANY Patton Oil Co.

SEC. 7 T. 27S R. 9W
LOC. SW SW SW

FARM Bradshaw "A" NO. 1

COUNTY Kingman

ROTARY TOTAL DEPTH 2235'
COMM. April 28, 1978
CONTRACTOR H-30, Inc.
ISSUED May 12, 1978

COMP. May 1, 1978

CASING

10 3/4"
8 5/8" - 255' cemented w/210 sxs cement
5 1/2"
4 1/2"

ELEVATION 1950 K.B.

FIGURES INDICATE BOTTOM OF FORMATIONS

| | |
|-----------------|-------|
| SAND | 155' |
| RED BED & SHALE | 650' |
| SHALE AND LIME | 1352' |
| ANHYDRITE | 1361' |
| LIME AND SHALE | 2235' |
| RTD | 2235' |

RECEIVED
STATE COMMISSION FOR PROFESSIONS

MAY 15 1978

Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britling
Dean Britling

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 12th. day

May, 1978.

WILSON
NOTARY
PUBLIC
My Commission Expires
June 30, 1978

Elsie Willison
Elsie Willison - Notary Public