

This form shall be filed in duplicate with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within ten days after the completion of the well, regardless of how the well was completed.

Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on side one will be of public record and side two will then be held confidential.

Circle one: Oil, Gas, Dry, SWD, OWWO, Injection. Type and complete ALL sections. Applications must be filed for dual completion, commingling, SWD and injection, T.A.

Attach wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). KCC # (316) 263-3238. (Rules 82-2-105 & 82-2-125)

OPERATOR Wildcat Resources

API NO. 095-21,211-0000

ADDRESS Rt. # 3

COUNTY Kingman

Hillsboro, Kansas 67063

FIELD CASLEY

**CONTACT PERSON Merle Schlehuber

PROD. FORMATION tight hole

PHONE 316-483-3618

LEASE Tip Top Credit Union

PURCHASER

WELL NO. 2

ADDRESS

WELL LOCATION SW SE SW

DRILLING Contractor Kansas Drilling & Well Service, Inc.

330 Ft. from SOUTH Line and

CONTRACTOR

990 Ft. from EAST Line of

ADDRESS Box 254

the SEC. 2 TWP. 28 RGE. 5W


Marion, Kansas 66861

WELL PLAT

PLUGGING

CONTRACTOR

ADDRESS



KCC KGS (Office Use) RECEIVED STATE CORPORATION COMMISSION JUN - 7 1982 06-07-82 CONSERVATION DIVISION Wichita, Kansas

TOTAL DEPTH 1975' PBTD

SPUD DATE 2-7-82 DATE COMPLETED 2-13-82

ELEV: GR 1408 DF KB 1416

DRILLED WITH (CABLE) (ROTARY) (AIR) TOOLS

Amount of surface pipe set and cemented 229' KB DV Tool Used? No

AFFIDAVIT

STATE OF Kansas, COUNTY OF Marion SS, I,

Merle Schlehuber OF LAWFUL AGE, BEING FIRST DULY SWORN UPON HIS OATH,

DEPOSES THAT HE IS a representative (FOR) (OF) Wildcat Resources

OPERATOR OF THE Tip Top Credit Union LEASE, AND IS DULY AUTHORIZED TO MAKE

THIS AFFIDAVIT FOR AND ON THE BEHALF OF SAID OPERATOR, THAT WELL NO. 2 ON

SAID LEASE HAS BEEN COMPLETED AS OF THE 1 DAY OF June, 19 82, AND THAT

ALL INFORMATION ENTERED HEREIN WITH RESPECT TO SAID WELL IS TRUE AND CORRECT.

FURTHER AFFIANT SAITH NOT.

SUBSCRIBED AND SWORN BEFORE ME THIS 1st DAY OF June, 19 82.

(S) Merle Schlehuber

CAROLYN KLEIBER STATE NOTARY PUBLIC Marion County, Kansas Appt. Expires Dec. 10, 1983

Carolyn Kleiber

NOTARY PUBLIC

MY COMMISSION EXPIRES:

**The person who can be reached by phone regarding any questions concerning this information. Within 45 days of completion, a witnessed initial test by the Commission is required if the well produces more than 25 BOPD or is located in a Basic Order Pool.


MERLE SCHLEHUBER

316-947-13

15-095-21211-0000

FIELD REPORT

DATE. February 11-1982
OPERATOR. Tip Top Credit Union
LEASE. Tip Top Credit Union
LOCATION. SEC. 2 . TWP. 28 . RGE. 5 W
COUNTY. Kingman

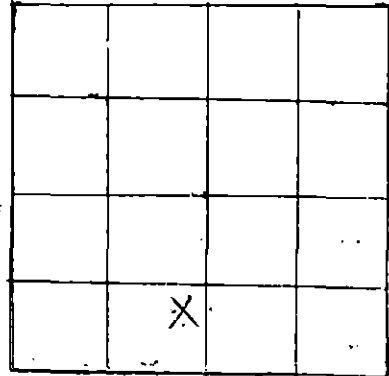

Company man - Merle Schlehuber
Plugging Contractor - C+S Well Service
REMARKS. (WHAT WAS SAID OR SEEN). Eldorado Co.

I was contacted by Warren Kirkpatrick @ 10⁰⁰ AM
2-11-82, that there had been a blow-out @ the
Tip Top Credit Union lease. I arrived @ the
location @ 12⁰⁰ noon. Surface pipe was set @ 250'
w/ 8 5/8" + D. 3842'. Set long string 5 1/2" @ 3842'.
Run 5 1/2" w/ no B-head on 8 5/8". Blowed out @ 1890'
Well was flowing 1000 bbls. salt water per hr.
Red Adair Co., Inc. was @ location, set BOP on 8 5/8" +
run water in pits. Well run temp. survey, gas face
was @ 1890' Well Perf. 5 1/2" @ 2000' w/ 4 shifts. Flow
pumped. 5 1/2" w/ 80 bbls. mud, vis - 38 wt. 10 #. Killed
flow @ 11¹⁵ PM, displaced mud w/ 80 bbls. water. Cemented
w/ 600 lbs 60 # poz mix 3% C.C., pumped plug to 1865',
Cement Circ., cemented solid outside 5 1/2" to top of 8 5/8"
Surface pipe. Job completed @ 12⁴⁰ PM 2-12-82
STP-800 #

FOR THE STATE. M. D. Bush

MAKE (2) TWO COPIES, KEEP ONE AND SEND ORIGINAL TO: KCC 200 COLORADO DERBY BLDG. WICHITA KANSAS 67202

RECEIVED
STATE CORPORATION COMMISSION

FEB 16 1982
CONSERVATION DIVISION
Wichita, Kansas

KANSAS CORPORATION COMMISSION
202 W. 1st St. 200 COLORADO DERBY BLDG.
WICHITA, KANSAS 67202