

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 14 Twp. 28S Rge. (E) 10 (W)

Location as "NE/CNW/SW" or footage from lines C SE SE  
Lease Owner Paxco, Inc.  
Lease Name PENNECK Well No. #1  
Office Address 245 S. Terrace, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed May 27, 1975  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced May 27 1975  
Plugging completed 1:30 a.m. May 27 1975  
Reason for abandonment of well or producing formation

NORTH



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Bieberstien  
Producing formation Depth to top Bottom Total Depth of Well 4,426 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	surface			8 5/8"	7 jts. 301'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud to 250'. Pushed plug to 250' w/35 sx. cement.  
Mud to 40', 1/2 sack of hulls, wood plug, and 15 sx. cement.  
2 sx. cement in rathole.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 23 1975  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sun Cementing  
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
William S. Schachle (employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) William S. Schachle  
William S. Schachle  
P. O. Box 783, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of July, 1975

My commission expires December 30, 1978

Arlene Bailey  
Arlene Bailey Notary Public



DRILLERS WELL LOG

Date Commenced: May 12, 1975  
 Date Completed: May 27, 1975

Aspen Drilling Co.  
 PENNECK #1  
 C SE SE Sec. 14-T28S-R10W  
 Kingman County, Kansas

Surface soil and sand	15'
Surface sand and shale	302'
Shale and sand	1,149'
Anhydrite	1,155'
Shale, shells, and lime	1,450'
Shale and shells	1,600'
Redbed, shale, and lime	1,768'
Shale, shells, and lime	1,980'
Lime and shale	2,680'
Lime	2,730'
Lime and shale	3,633'
Lime	4,036'
Lime and shale	4,105'
Chert	4,139'
Lime with shale	4,170'
Lime	4,275'
Lime with shale	4,318'
Lime	4,390'
Lime with shale	4,404'
Lime	4,426'
T. D.	4,426'

Elevation: 1697' G. L.  
 1703' D. F.  
 1708' K. B.

ELECTRIC LOG TOPS

Hollenberg	1596' (+ 112)
Herington	1651' (+ 57)
Krider	1683' (+ 25)
Winfield	1824' (- 116)
Base Florence	1913' (- 205)
Topeka	
Heebner	3367' (-1659)
Douglas	3385' (-1677)
Brown Lime	3561' (-1853)
Lansing	3573' (-1865)
Stark	3886' (-2178)
Mississippian	4098' (-2390)
Kinderhook	4183' (-2475)
Viola	4188' (-2480)

RECEIVED  
 STATE CORPORATION COMMISSION

JUL 23 1975

CONSERVATION DIVISION  
 Wichita, Kansas

Surface Casing: Set 7 jts. of used 8 5/8" surface casing at 301' w/225 sx. common cement - 3% calcium chloride and 2% gel.


Plugged: D & A  
 Filled w/mud to 250'. Pushed plug to 250' w/35 sx. cement. Mud to 40' 1/2 sk. hulls and wood plug, 15 sx. cement. 2 sx. cement in rathole.

STATE OF KANSAS )  
 ) ss  
 COUNTY OF BARTON )

William S. Schachle of lawful age, does hereby swear and state that the facts and statements contained herein are true and correct to the best of his knowledge.

*William S. Schachle*  
 WILLIAM S. SCHACHLE

Subscribed and sworn to before me this 22nd day of July, 1975.

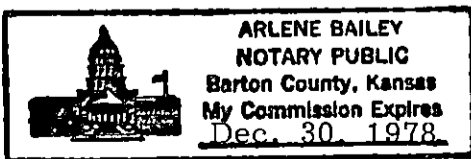

*Arlene Bailey*  
 Arlene Bailey, Notary Public