


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Edwards County, Sec. 6, Twp. 24S Rge. 16W (E) (W) X
Location as "NE/CNWSW" or footage from lines C N/2 NW
Lease Owner Barnett Oil Company
Lease Name Galliart "B" Well No. 1
Office Address 411 First National Bank Bldg., Wichita, KS 67202
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed October 1 19 73
Application for plugging filed October 1 19 73
Application for plugging approved October 1 19 73
Plugging commenced October 1 19 73
Plugging completed October 1 19 73
Reason for abandonment of well or producing formation D & A

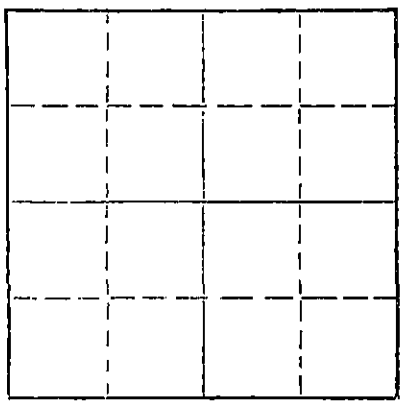

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G.R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,335 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	332'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged w/40 sx. @ 500'.
w/25 sx. @ 300'.
1/2 sk. hulls & plug @ 40' w/15 sx. to surface.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202


STATE OF Kansas COUNTY OF Sedgwick, ss.
Jimmie L. Farrice (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jimmie L. Farrice
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of October, 19 73

My commission expires March 8, 1977

Linda H. Dickens
Notary Public.



DRILLERS LOG

No. 1 Galliard "B"

CASING RECORD:	COMPANY:	Barnett Oil Co.	DESCRIPTION:
8-5/8" @ 332'	CONTRACTOR:	Red Tiger Drilling Co.	C N/2 NW/4
w/350 sx cement	COMMENCED:	September 19, 1973	6-24S-16W
	COMPLETED:	October 1, 1973	Edwards County,
TOTAL DEPTH: 4,335'			Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	90	
Sand, Clay & Shale	90	345	
Shale & Sand	345	1082	
Anhydrite	1082	1109	
Shale	1109	1970	
Shale & Lime Streaks	1970	2144	
Lime & Shale	2144	3680	
Lime	3680	4335	

RECEIVED
STATE CORPORATION COMMISSION
OCT 15 1973
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jimmie L. Farrice
Jimmie L. Farrice

Subscribed and sworn to before me this 11th day of October, 1973.

Linda N. Dickens
Notary Public

My Commission Expires:

March 8, 1977

