


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division,
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

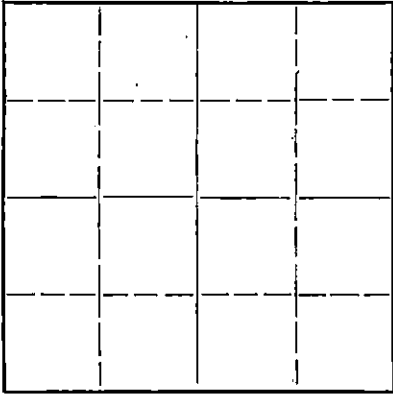

Locate well correctly on above
Section Plat

Stafford

County. Sec. 13 Twp. 24S Rge. (E) 13W (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE/4

Lease Owner Phillips Petroleum Company

Lease Name Hartnett

Well No. 1

Office Address Bartlesville, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) 3-9-44

Date well completed 3-9-44 19

Application for plugging filed 3-9-44 19

Application for plugging approved 3-9-44 19

Plugging commenced 3-9-44 19

Plugging completed 3-9-44 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C.T. Alexander

Producing formation Depth to top Bottom Total Depth of Well 4116' Feet

Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
LKC	Dry	3530'		8 5/8"	381'	None
Viola	Dry	3889'				
Arbuckle	Dry	4086'				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled w/ mud to 388' & ran 15 sax of cement from 388' to 343'. Filled w/
mud from 343' to 26'. Ran 15 sax of cement from 26' to base of cellar.

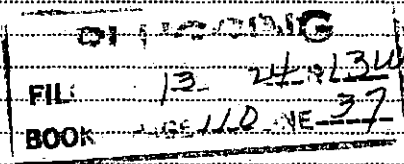

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to F.W. Shelton
Address Box 779 - Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

F.W. Shelton (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature)

Box 779 - Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of March, 1944

My commission expires March 27, 1946

Notary Public.

Form No. 873

Formation Record

Lease Hartnett

Well No. 1

FROM	TO	Formation	REMARKS
0	225	Sand, Shells & Clay	<u>Elevation 1905' D.F.</u>
225	395	Shale & Shells & Red Bed	
395	616	Red Bed & Shale	
616	1116	Red Bed, Salt, Shale & Shells	
1116	1416	Salt, Shale & Shells	
1416	1698	Shale & Sand	
1698	1868	Shale & Shells	
1868	2228	Lime	
2228	2628	Lime & Shale	
2628	2743	Shale	
2743	2822	Shale & Shells	
2822	2845	Lime & Shale	
2845	2875	Shale	
2875	3162	Lime & Shale	
3162	3428	Lime	
3428	3609	Lime & Shale	Top L2C 3530'
3609	3894	Lime	Top Viola 3889'
3894	3903	Cherty Lime & Shale	
3903	3919	Chert	
3919	3935	Lime & Chert	Light show oil 3929½'-31'
3935	3942	Chert	
3942	3995	Cherty Lime	
3995	4025	Lime	
4025	4047	Sandy Shale	
4047	4105	Sandy Shale & Lime	Top Arbuckle 4086' - Streaked porosity w/ no shows.
4105	4116	Lime	

PLUGGING

 FILE 15-13-24-134
 BOOK PAGE-40-WE-37

STATE OF MISSISSIPPI

COMMISSIONER

MAR 31 1917

RECEIVED

L. H. H.