

15-095-20211-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kingman County. Sec. 2 Twp. 28S Rge. ~~XXX~~ 6 (W)

Location as "NE/CNW/SW" or footage from lines SW SE SW

Lease Owner Pickrell Drilling Company

Lease Name Young "P" Well No. 1

Office Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 2 19 70

Application for plugging filed July 2 19 70

Application for plugging approved July 2 19 70


Plugging commenced July 2 19 70

Plugging completed July 2 19 70

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

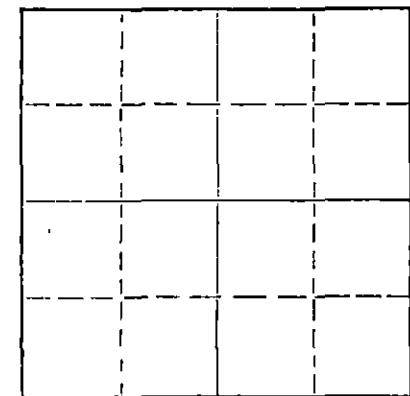

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation Depth to top Bottom Total Depth of Well 4334 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	204'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 190 w/25 sacks cement, Plug @ 40' w/10 sacks cement,
2 sacks cement @ Rathole.

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1970
CONSERVATION DIVISION
Wichita, Kansas
7-10-70

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 Fourth National Bank Bldg, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 7th day of July, 1970



Esther Lamone
Notary Public.

My commission expires January 19, 1973

ROTARY DRILLING LOG 15-095-20211-0000

COMPANY: Pickrell Drilling Company
 705 Fourth National Bank Bldg.
 Wichita, Kansas 67202

LOCATION: Young "P" No. 1, SW SE SW, Sec. 2-28S-6W
 Kingman County, Kansas

Rotary Drilling Commenced 6/18/70
 Rotary Drilling Completed 7/2/70

CONTRACTOR: **PICKRELL DRILLING COMPANY**
 Wichita, Kansas

CASING RECORD: Run 10 Jts. 8-5/8" surface casing set @ 204' K.B. Cemented with
 150 sacks cement. Completed 8:15 P.M. June 18, 1970. Circulated.
 No oil string run. D & A, Plugged 9:15 P.M. July 2, 1970.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

15	Sand		<u>C.F.S.</u>
204	Red Rock		3490
340	Red Rock & Shale		3520
1050	Shale		3563
1540	Shale & Lime		3915
1750	Lime & Shale		3930
1980	Shale & Lime		3940
2230	Lime & Shale		4265
2440	Shale		4275
2580	Shale & Lime		4280
2690	Lime & Shale		4290
2969	Shale & Lime		4300
3080	Shale & Sandy Lime		4334
3315	Lime & Shale		
3490	Lime		
3528	Lime & Shale		
3618	Lime		<u>S.L.M.</u>
3798	Shale & Lime	Board	3388.54
3803	Lime	Strap	3387.16
3915	Shale & Lime		1.38 Short
3947	Miss.		
4010	Miss. Dolomite & Chert		
4040	Miss. & Lime		<u>Slope Tests</u>
4136	Miss. Lime & Chert		2000
4160	Lime & Chert		2500
4187	Miss. Lime		3000
4255	Lime & Shale		3500
4263	Shale		4000
4275	Misner Sand		
4277	Sand		
4320	Viola		
4334	RTD		

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 10 1970
 CONSERVATION DIVISION
 Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
 By [Signature]
 C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS }
 COUNTY OF SEDGWICK } ss.:

On this 7th day of July, 19 70, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Gave under my hand and seal of office the day and year last above written.

My commission expires: January 19, 1973

[Signature]
 Esther Lamone Notary Public

