


15-095-00376-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

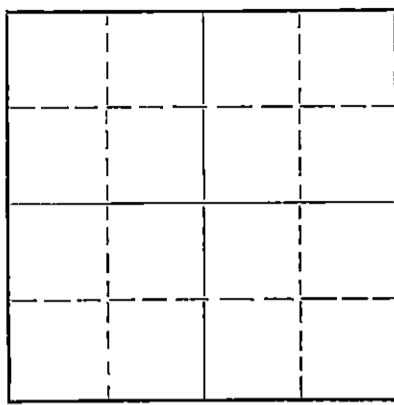

Locate well correctly on above Section Plat

Kingman County. Sec. 14 Twp. 28 Rge. 6 (E) (W)
Location as "NE/CNW*SW*" or footage from lines SW SE SE
Lease Owner Greenland Drlg. Co., et al
Lease Name McHenry Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 11/28/54 19
Application for plugging filed 11/28/54 19
Application for plugging approved 11/28/54 19
Plugging commenced 11/28/54 19
Plugging completed 11/28/54 19
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4003 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		surf.	185'	8 5/8"	185'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Solid plug w/15 sks. cement @ 180' and solid plug and 5 sks. on top tied top plug w/wire

12-3-54

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Greenland Drlg. Co.
Address 506 Union Nat'l Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
D. M. Allen (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. M. Allen
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 2 day of December, 19 54

My commission expires July 8, 1957
Mary Ellen ... Notary Public.

24-7368-S 3-53-20M



15095-00376-0000

WELL LOG

Lease Owner: Greenland Drilling Co., et al
Contractor: Greenland Drilling Co.
Farm: McHenry #1
Total Depth: 4003'
Comm: 11/17/54
Comp: 11/29/54
Casing: 185' of 8 5/8" w/200 sks cement

Sec. 14-28-6
Loc. SW SE SE
County: Kingman
Elevation: 1479 RB
Production: D & A

Figures Indicate Bottom of Formations:

185	Rock & clay	<u>TOPS:</u>	
215	Red rock		
350	Shale w/shells	Brown Lime	3058
490	Shaled shells	Lansing	3080
815	Shale, shells w/salt	Mississippi	3944
920	Shale, lime w/salt		
955	Lime w/shale brks.		
1695	Shale & lime		
2020	Shale		
2260	Shaled lime		
2505	Lime & shale		
2680	Limed shale w/silt		
3005	Lime & shale		
3135	Silt & shaled lime		
3507	Lime		
3834	Lime & shale		
3883	Limed shale		
4003	Mississippi		
4003	TDR		

State of Kansas)
) ss.
County of Sedgwick)

I, D. M. ALLEN, of the Greenland Drilling Company upon oath state that the above and foregoing is a true and correct copy of the log of the McHenry #1 well.

D. M. Allen

D. M. Allen

Subscribed and sworn to before me this 2nd day of December, 1954.

Walter L. ...
Notary Public

My commission expires: 7/8/57

PLUGGING
WEL SEC 14 T 28 R 6W
BOOK PAGE 10 LINE 37