

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

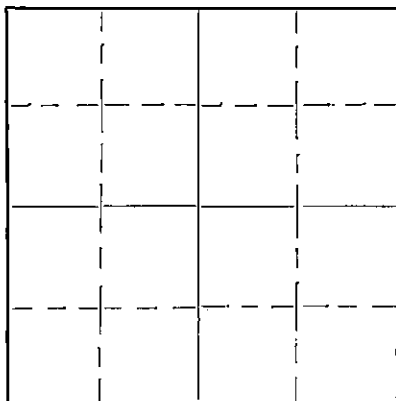

Locate well correctly on above
Section Plat

STAFFORD County. Sec. 14 Twp. 24S Rge. (E) 11 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines.....

Lease Owner Jock Garden et al. (J.A. Aylward only purchased material

Lease Name Pearl Sloan and plugged well) Well No. 1

Office Address.....

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date, well completed September 26, 1938. 193

Application for plugging filed May 4, 1944. 193

Application for plugging approved May 5, 1944. 193

Plugging Commenced May 14, 1944. 193

Plugging Completed May 28, 1944. 193

Reason for abandonment of well or producing formation

Oil Exhausted

If a producing well is abandoned, date of last production unknown 193

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon R. Petty

Producing formation..... Depth to top..... Bottom..... Total Depth of Well 3815 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				7"	3798'	2067'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Filled with drilling mud to bottom of 10" or 260'
15-sacks cement at 260' to 240' filled with drilling mud to
base of cellar--10 sacks cement at base of cellar.

"CORRECTED COPY"



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J. A. Aylward

Address 813 First National Bank Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

R. E. Evans (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]

(Address)

SUBSCRIBED AND SWORN to before me this 2nd day of JAN January 1946

My commission expires January 19, 1947.



1-4-46

Notary Public

ROBERTSON PETRO. CO.
 Pearl Sloan (Community) No. 1.

SEC. 14 T. 24 R. 11W.
 SW SE SE

Total Depth. 3815.
 Comm. 9-7-38 Comp. 9-26-38
 Shot or Treated.
 Contractor, Jock Garden.
 Issued, 11-12-38

CASING:
 10" 246'
 7" 3798

Elevation.

Production. Pot. 3098 B.

Figures Indicate Bottom of Formations.

Shale and shells	1030
Salt	1260
Shale and shells	1475
Lime broken	1695
Lime	1780
Lime broken	1900
Lime and shale	2840
Shale and shells	2900
Lime	3085
Broken lime	3160
Lime	3260
Shale	3390
Lime Kansas City	3405
Show oil 3425	
Lime	3460
Lime and chert	3540
Lime	3665
Shale and shells	3715
Shale	3798
Oil show 3800	
Oil sand	3815

Total Depth.

Started flowing 3802
 Sand hardened 3809-15

PLUGGING
 FILE 14 24 11W
 BOOK PAGE 116 SE-19

STATE OF OREGON
 DEPARTMENT OF GEOLOGY
 MAY 5 - 1938