

15095-20024-0000

Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County. Sec. 15 Twp. 28S Rge. (E) 6 (W)

Location as "NE/CNW%SW%" or footage from lines C SW NW

Lease Owner Alpine Oil & Royalty Co., Inc.

Lease Name Elizabeth Riley Well No. 1

Office Address 800 Bitting Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed May 25, 1967 19

Application for plugging filed May 25, 1967 (by phone) 19

Application for plugging approved May 25, 1967 (by phone) 19


Plugging commenced May 25, 1967 19

Plugging completed May 26, 1967 19

Reason for abandonment of well or producing formation Nonproductive in commercial quantities

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

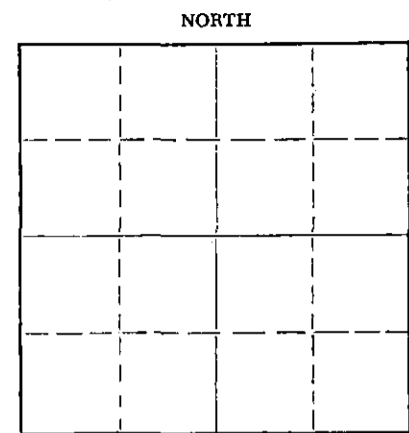

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation Depth to top Bottom Total Depth of Well 4300 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	258'	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud from total depth to 250 feet. Set first plug with 24 sacks cement and 1/2 sack hulls; heavy mud to 40 feet; set second plug with 10 sacks cement and 1/2 sack hulls; 5 sacks cement for rat hole

RECEIVED
STATE CORPORATION COMMISSION

JUN 1 1967

6-1-67
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.

Address Sutton Place, Wichita, Kansas, 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

DWIGHT J. WILSON (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Elizabeth Riley

800 Bitting Building, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 31st day of May, 19 67

Evelyn Wanko
Notary Public.

My commission expires December 10, 1968

