

15-155-02542-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Map or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Plat

Reno County, Sec. 14, Twp. 23, Rge. 4 (E) 4 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE 1/4 NE 1/4 SE 1/4
Lease Owner Chas. L. Jenkins
Lease Name Ackley Well No. 3
Office Address Box 603, Blackwell, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed January 21, 1935
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced November 27 19 43
Plugging completed December 4 19 43
Reason for abandonment of well or producing formation Production too low
to warrant producing well
If a producing well is abandoned, date of last production October 19 43
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Chat Depth to top 3263 Bottom 3450 Total Depth of Well 3610 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-------------|-----------|------|------|------------|--------------|--------------|
| Hunton Lime | Water | 3604 | 3610 | 15-1/2 | 285 | |
| Chat | Gas & Oil | 3263 | 3450 | 7 5-1/2 | 3596 1006 | 2701 1006 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped 6 sacks cement in bottom hole and shot pipe at 2680. Mudded hole to 200' and put in 25 sacks cement. Finished filling surface with mud and put 10 sacks cement at top of hole.

5-10-47

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Chas. L. Jenkins
Address Box 603, Blackwell, Oklahoma

STATE OF Oklahoma, COUNTY OF Kay, ss.
C. C. Jenkins (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *C. C. Jenkins*
Box 603, Blackwell, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of May, 1947

Austin M. Lanby
Notary Public.

My commission expires June 4, 1950


PLUGGING
FILE SEC 14 T 23 R 4 W
BOOK PAGE 29 LINE 4

15-155-82542-0000

WELL LOG

Ackley #3, Center of the NE of the NE of the SE/4, Sec 14-23-4,
Reno County, Kansas.

| <u>Formation</u> | <u>To</u> |
|-------------------|-----------|
| Surface Sand | 275' |
| Shale | 285' |
| Shale & Shells | 995' |
| Lime | 1030' |
| Shale & Shells | 1990' |
| Lime | 2000' |
| Shale & Lime | 2220' |
| Shale | 2255' |
| Shale & Lime | 2420' |
| Shale & Shells | 2610' |
| B. Lime | 2785' |
| Lime | 2830' |
| Shale & Lime | 2865' |
| Lime | 2955' |
| B. Lime | 3000' |
| Broken Lime | 3030' |
| Lime | 3060' |
| B. Lime | 3095' |
| Lime | 3135' |
| Shale & Shells | 3165' |
| Shale | 3215' |
| Shale & Shells | 3255' |
| Shale | 3263' |
| Chat | 3450' |
| Shale & Shells | 3465' |
| B. Lime | 3525' |
| Shale & Shells | 3565' |
| B. Shale & Shells | 3580' |
| Coring & Reaming | 3596' |
| Shale | 3602' |
| Show of Oil | 3604' |
| Total depth | 3610' |

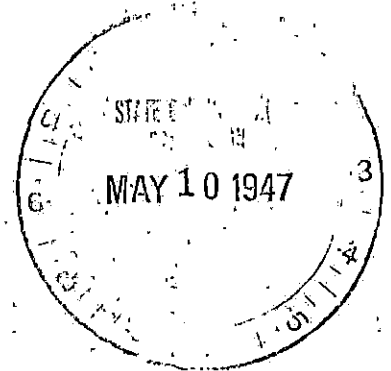

PLUGGING
FILE SEC 14 T 23 R 4W
BOOK PAGE 29 LINE 4