


15-155-02793-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

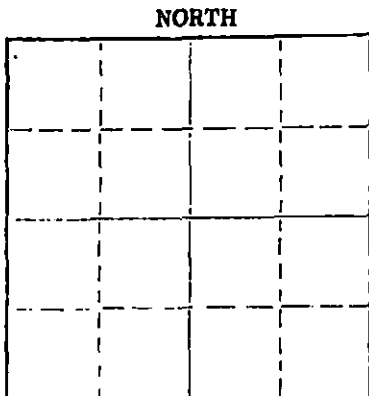

Locate well correctly on above Section Plat

Reno County, Sec. 12 Twp. 23 Rge. 4 (E) (W)X
 Location as "NE/CNW&SW&" or footage from lines NE-SW-NW
 Lease Owner Four-Way Operating, Inc.
 Lease Name Box 698 NEUFELD Well No. 3
 Office Address Box 698, Great Bend, Kansas 67530
 Character of Well (completed as Oil, Gas or Dry Hole) _____
 Date well completed _____ 19____
 Application for plugging filed January 5, 1976
 Application for plugging approved _____ 19____
 Plugging commenced January 19, 1976
 Plugging completed February 9, 1976
 Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3616 Feet
 Show depth and thickness of all water, oil and gas formations. 3430

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				12 1/2"	511'	0
				6 5/8"	3425'	1,552,95'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Tried to plug bottom but couldn't get below 1605'.
Set plug at 1605' with 20 gals. sand and 6 sacks cement.
Shot pipe @ 1550'. Pulled a total of 52 joints of 6 5/8" casing.
Set plug at 345'. Built a 20 ft. rock bridge. Dumped 20 ft. mud on the bridge and 25 ft. of cement.
Plugged well with 7 yards of ready mix concrete.

MAR 29 1976

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Rockhold Engineering, Inc. Wichita, Kansas
 Address Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

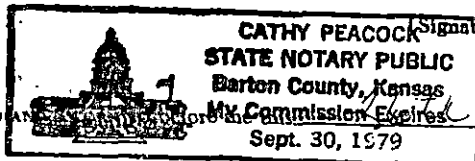

James W. Rockhold
 Box 698, Great Bend, Kansas 67530
 (Address)

Subscribed and sworn to before me this March day of 1976

Cathy Peacock
 Cathy Peacock
 Notary Public.

My commission expires September 30, 1979