

15-095-01758000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kingman County, Sec. 1 Twp. 28 Rge. 5 (E) W(W)

Location as "NE/CNW&SW" or footage from lines NW NE NE
Lease Owner The Shallow Water Refining Company
Lease Name Tract XX 17 Bartholomew Unit Well No. 3
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 9-9-65 19
Plugging completed 9-13-65 19
Reason for abandonment of well or producing formation Depleted.

NORTH

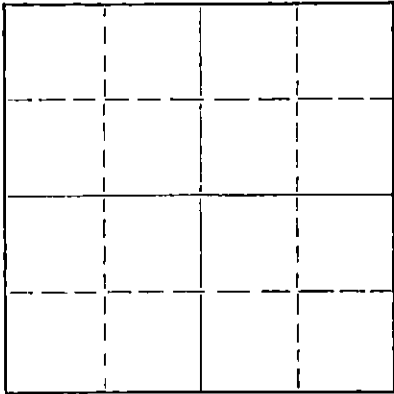

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well H. Justus
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3789 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	199'	None
				5-1/2"	3770'	3282'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3789', sanded hole to 3760' and dumped 5 sacks of cement @ 3760' with dump bailer. Pulled 5 1/2" casing, mudded hole from 400' to 190', set rock bridge to 180' and dumped 25 sacks of cement @ 180'. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

SEP 22 1965

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS
(If additional description is necessary, use BACK of this sheet)

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of September, 1965

Milton J. Volin
Notary Public.

My commission expires May 20, 1968

KANSAS WELL LOG BUREAU --- KANSAS GEOLOGICAL SOCIETY

508 EAST MURDOCK - WICHITA, KANSAS

Trail 17
15-095-01758-0000

COPY

COMPANY WESTGATE-GREENLAND OIL CO.

SEC. 1 T. 28 S. 5N

FARM Harding

NO. 3

LOC. NW NE NE

TOTAL DEPTH 3789'

COUNTY Kingman


COMM. 1-22-51

COMP. 2-17-51

SHOT OR TREATED

CONTRACTOR Jackson Drlg. Co.

ISSUED 6-16-51



CASING

8 5/8" 199' cem w/135 EXS.
5 1/2" 3770' cem w/75 EXS.

ELEVATION 1425

PRODUCTION Pot. 34 bbls.

FIGURES INDICATE BOTTOM OF FORMATIONS

clay, shale	145
shale, shells	425
shale, salt	675
lime, shale	3010
lime	3350
lime, shale	3789
Total depth	

Scout tops:
Mississippi chat 3730

1000 gallons Dowell Service-
3 bbls. oil per hr.

All measurements from top of
Derrick Floor.

RECEIVED
STATE CORPORATION COMMISSION

DEC 22 1964

CONSERVATION DIVISION
Wichita, Kansas