


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Kingman County, Sec. 26 Twp. 28S Rge. 8W KKV  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
Approx. C - NW/4  
Lease Owner Keener Oil Company  
Lease Name Martha Simons Well No. 1  
Office Address 406 National Bank of Tulsa Bldg., Tulsa  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole  
Date Well completed November 29, 1976  
Application for plugging filed Verbal Application 1976  
Application for plugging approved Verbal Approval 1976  
Plugging commenced November 29, 1976  
Plugging completed November 29, 1976  
Reason for abandonment of well or producing formation \_\_\_\_\_

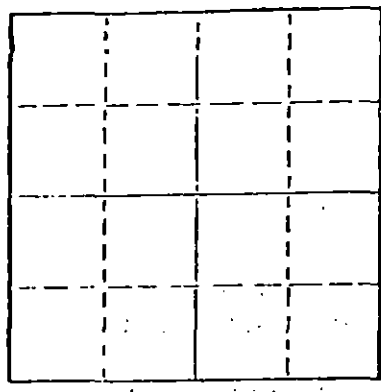

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4136'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	245'	None

DATE FILED IN THE COMMISSION  
12-3-1976  
DEC 03 1976

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4,136 ft. (rotary total depth) to 240 ft. Set plug at 240 ft. and cemented with 35 sacks cement.  
Filled hole with heavy rotary mud from 240 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 15 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Halliburton Services  
410 Union Center Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent (Employed by owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)

Subscribed AND SWORN TO before me this 2nd. day of December, 1976

My commission expires June 30, 1978  
Elsie Willison Notary Public.



KANSAS GEOLOGICAL SOCIETY API NO. - 15-095-20,540  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

-0000


COMPANY Keener Oil Company

SEC. 26 T. 28S R. 8W  
 LOC. Approx. C - NW/4

FARM Martha Simons NO. 1

TOTAL DEPTH 4,136'  
 COMM. November 20, 1976 COMP. November 29, 1976  
 SHOT OR TREATED  
 CONTRACTOR H-30, Inc.  
 ISSUED December 2, 1976

COUNTY Kingman  
 KANSAS



CASING

20	10				
15	8-5/8"	245'	cemented w/250 sxs cement	ELEVATION 1,644'	KB
12	6				
13	5				

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	185'
Red Bed	250'
Red Bed and Shale	1,200'
Shale and Lime	2,590'
Lime and Shale	3,410'
Lime	3,661'
Shale and Lime	3,717'
Lime and Shale	4,131'
Lime	4,136'
Rotary Total Depth	4,136'


I hereby certify the above and foregoing  
 to be a true and correct log of the above  
 described well as shown by the drilling  
 reports.

H-30, INC.

*Dean Britting*  
 Dean Britting

State of Kansas }  
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary  
 Public in and for said county and state  
 this 2nd. day of December, 1976.



*Elsie Willison*  
 Elsie Willison-Notary Public

My Commission Expires:  
 June 30, 1978