


DISTRICT CONSERVATION AGENT'S REPORT

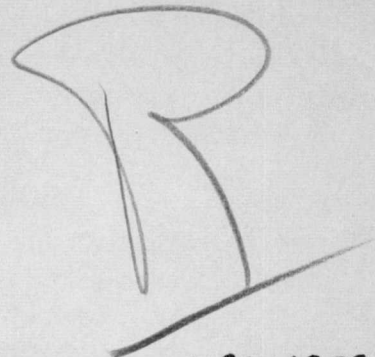

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

15-155-02690-0000

FILE NO. 20-27

LOCATION SE-NE-SE

SEC. 34 TWP. 23 RGE. 4-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 7 Lease McElwain

Operator Sohio Petro-Co Address Box 71 - Russell - Kans-

Field \_\_\_\_\_ County Bevier

Total Depth 3360 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 1 5/8" - 153 ft. Circulated with cement -  
1 3/4" - 494 ft. Circulated with cement. 7" casing set at 325 ft.  
5/8" casing set at 3317 ft. - Shot off & pulled the 5/8" casing.  
Filled with chat to 3330 ft. Dumped 8 sacks of cement in the 7" casing  
at 3230 ft. - Shot off & pulled the 7" casing. - Mud to 230 ft.  
Set Rock Bridges & 25 sacks of cement at 230 ft. - Mud to  
13 ft. - Bridge & 10 sacks cement at the surface  
Frank Carroll - Plugging Contractor

RECEIVED  
Conservation Div.

SEP 6 X 1950 9-6-50

STATE CORPORATION  
COMMISSION  
KANSAS

District Conservation Agent

Date 9-1-50

**PLUGGING**  
FILE SEC 34 T 23 R 4W  
BOOK PAGE 20 LINE 27